

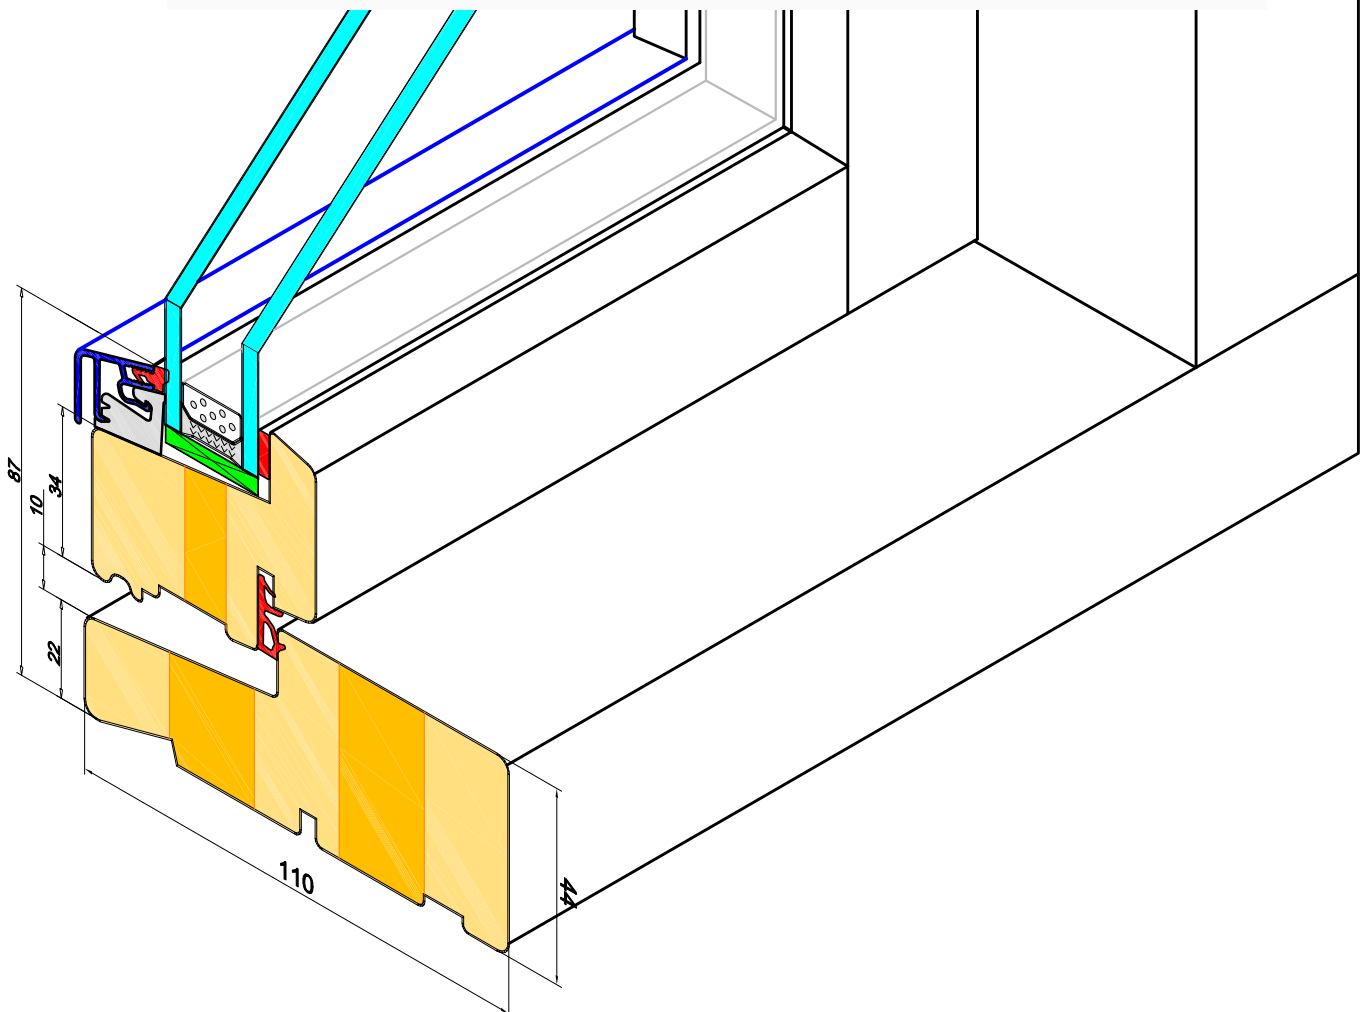
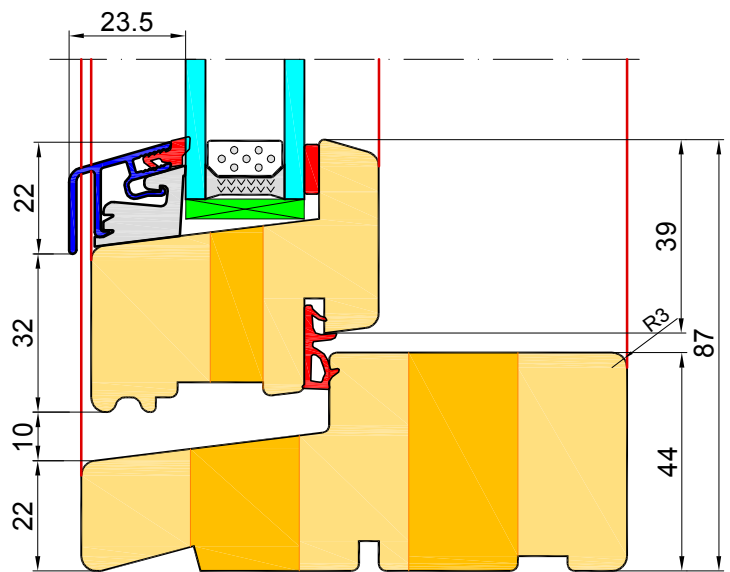


**EURO - PROFILE SOFT - WINDOW.**

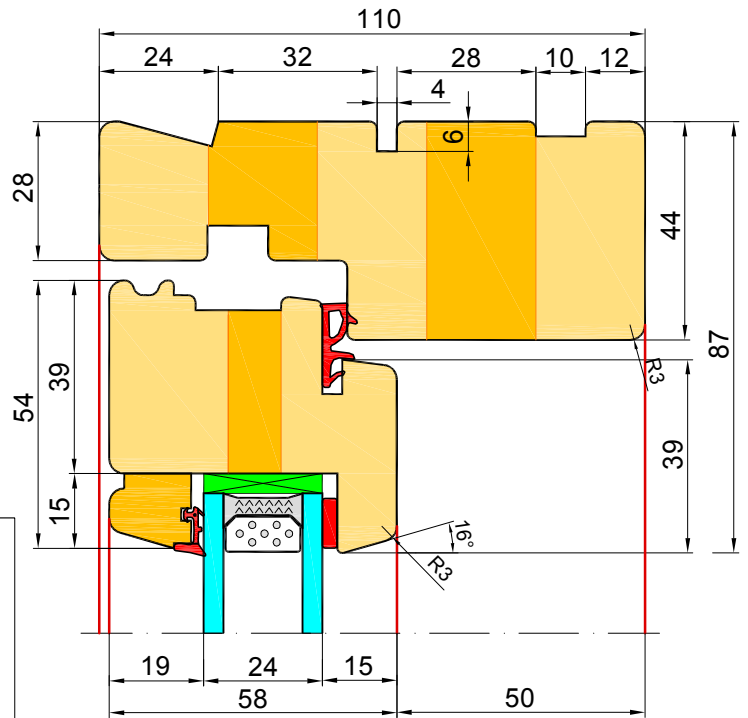

	<i>technical issue</i>	<i>description</i>	<i>notes</i>
1	CONSTRUCTION	PROFIL: SOFT, CLASSIC	
2	MATERIAL	<ul style="list-style-type: none"> <li>- pine fingerjointed,</li> <li>- pine sorted (not fingerjointed),</li> <li>- oak,</li> </ul>	
3	FITTINGS OPTIONS	<ul style="list-style-type: none"> <li>- Side Hung,</li> <li>- Side Hung - fasteners and casement stay,</li> <li>- Top Hung haczyki - fasteners and casement stay,</li> <li>- Side Guided 90 degrees with espagnolette,</li> <li>- Side Swing 90 - fasteners and casement stay,</li> <li>- flying mullion,</li> <li>- Topguided - fasteners and casement stay,</li> <li>- TopTurn 180,</li> <li>- Side Swing 180,</li> <li>- FIX,</li> </ul>	
4	WINDOW SHAPE	- rectangle,	
5	SIZE RANGES	<p>Max and min dimensions of single-sash windows:</p> <ul style="list-style-type: none"> <li>- Side hung: width= 370 - 900mm, height= 460 - 1660mm,</li> <li>- Topguided: width= 400 - 1565mm, height= 370 - 1565mm,</li> <li>- Side Swing 90°: width= 390 - 884mm, height= 460 - 1660mm,</li> <li>- Top Turn 180°: width= 410 - 1565mm, height= 625 - 1565mm</li> </ul> <p>(maximum sash weight - windows - 45kg)</p> <ul style="list-style-type: none"> <li>- Doors: width= 500 - 1115; height max= 2445mm.</li> </ul> <p>(maximum sash weight - doors - 80kg)</p>	
6	Glazing	<p>Glazing unit thickness:</p> <ul style="list-style-type: none"> <li>- EURO sash - 24mm</li> <li>- EURO FIX - 28mm</li> <li>- EURO - FIX - sash profile - 24mm</li> <li>- EUROALU sash - 24mm or 40mm,</li> <li>- EURO ALU FIX - 24 or 36mm,</li> <li>- EURO ALU FIX - sash profile - 24 i 40mm.</li> </ul>	
7	TIMBER FINISH	Final painting with water-based opaque paints or stains	
8	COLOUR	<p>STANDARD:</p> <ul style="list-style-type: none"> <li>- RAL 1013, 3009, 6020, 7016, 7032, 7042, 7044, 8016, 9010, 9016, 9017</li> <li>- NCS-S-0502-Y</li> <li>- Transparent TM1703, TM1515, TM7130, TM666, TM1501, TM367 i TM5207</li> </ul>	
9	GLAZING BARS	<ul style="list-style-type: none"> <li>- konstrukcja 104mm.</li> <li>- vienna 25mm, 42mm, 60mm.</li> <li>- internal glazing bars (inside insulated glass unit),</li> </ul>	
10	Widths of construction elements	<p>Windows</p> <p>sash: 54mm, frame: 44mm,</p> <p>Doors</p> <p>sash: 104mm, frame: 44mm,</p>	
11	Vents	<ul style="list-style-type: none"> <li>a) TRYKVENT 389 white or gray,</li> <li>b) TRYKVENT 283 white or gray,</li> <li>c) Trimvent 90 HL 250 natural, white, brown,</li> <li>d) Trimvent 90 HL 425 natural, white, brown,</li> <li>e) Trimvent 90 HL 695 natural, white, brown.</li> </ul>	

	<i>technical issue</i>	<i>description</i>	<i>notes</i>
12	ADDITIONAL OPTIONS	Corner connector 135degrees EURO + EURO Corner connector 90degrees EURO + EURO Widening 110x100 Widening 110x20 Widening 110x30 Widening 110x50 Widening 110x60 Widening 110x70 Widening 110x80 Threshold packer 15x92mm, Threshold packer 40x118mm (SAPELLI) Transport list under the fiberglass 20x45mm PURENIT: 30x60mm; 50x60; 60x60; 80x60; 90x60; 100x60; 110x60; 120x60; 130x60; 150x60; 180x60; 200x60; 210x60; 230x60; 250x60mm.	






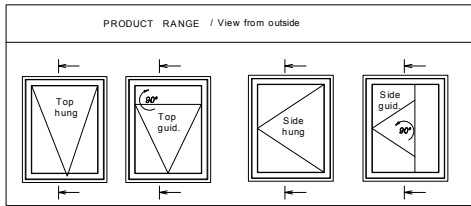


**1**






**WINPRO**

Window	Dimensions	Outer frame	Sash	Drawing	Informations	Components
		Door sill				
		Window sill				
Profile	Softline					
2-colour	No					
Product finish both sides	RAL9010					
Bottom bead color	RAL9010					
Vienna bar colour (if exists)	select					
Threshold type	Window timber threshold 44mm					
Threshold undercutting	No cutting in threshold					
No cutting in threshold	Cutting 10x12mm from inside					
Cutting 10x12mm from inside	Groove 10x10mm from inside					
Groove 10x10mm from inside						
With adjufix installation system?	Without adjufix					



**2**

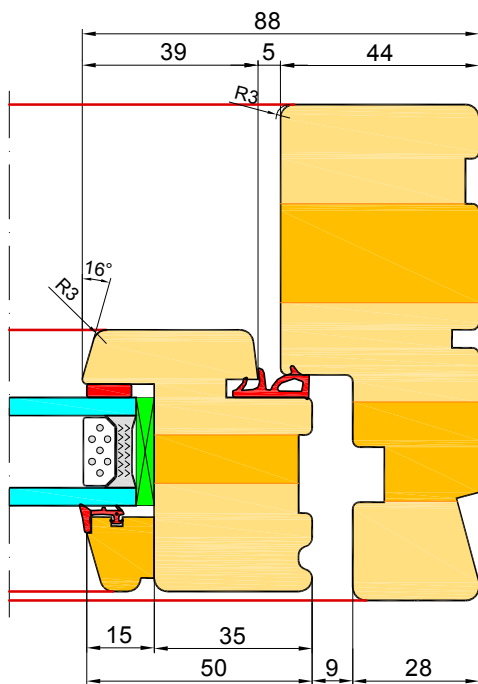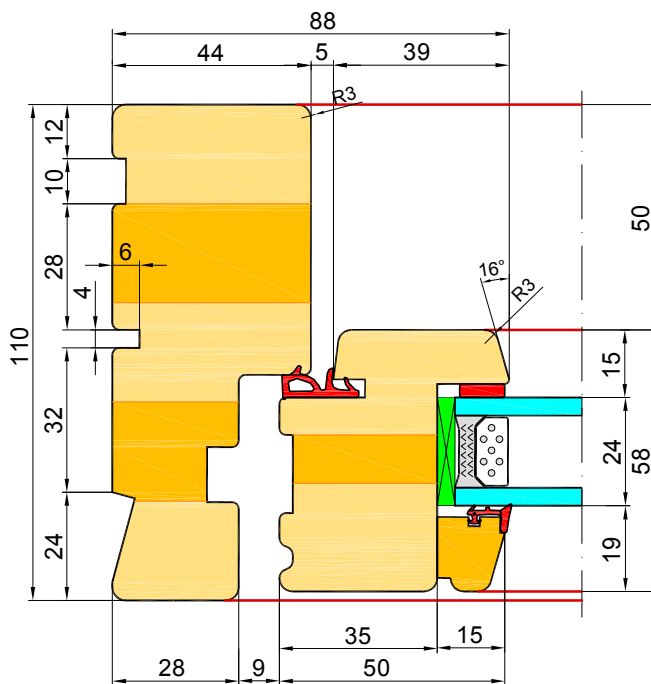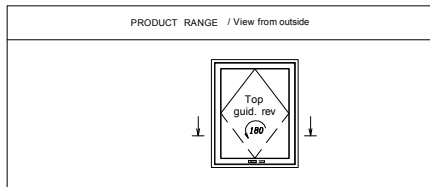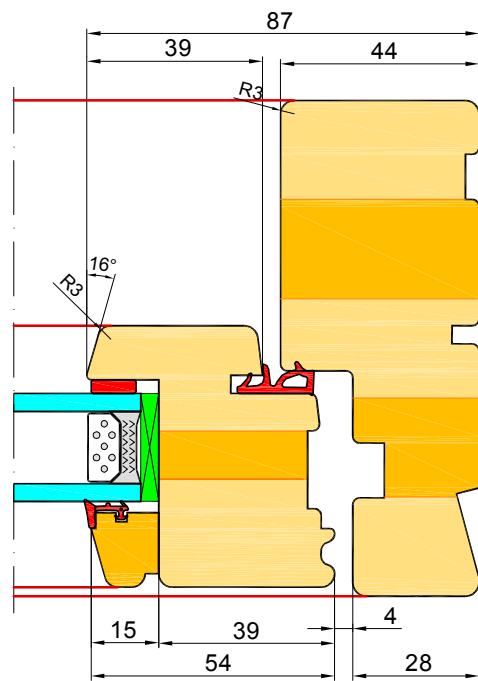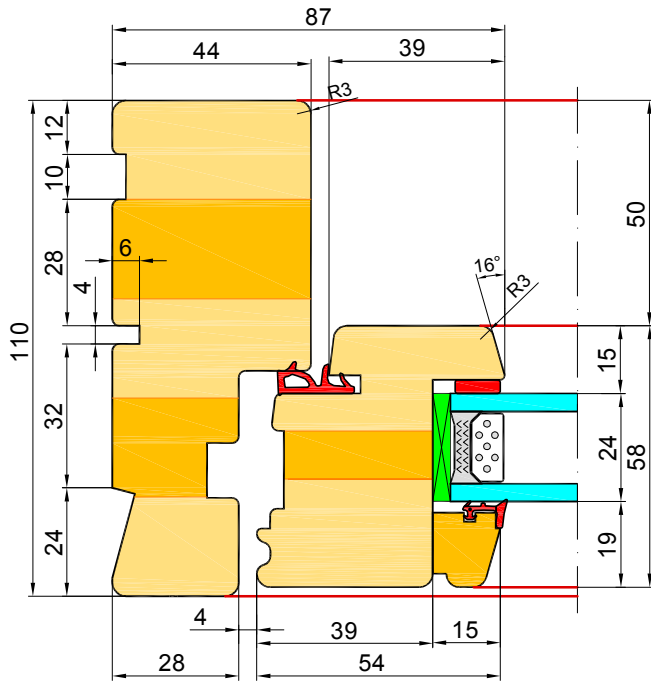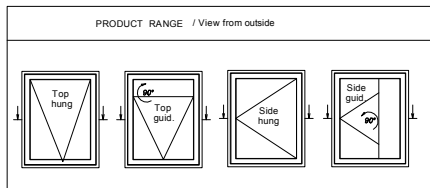







**EURO - PROFILE SOFT -FIX**

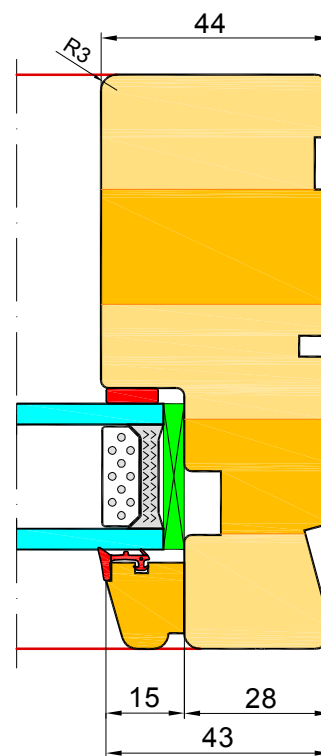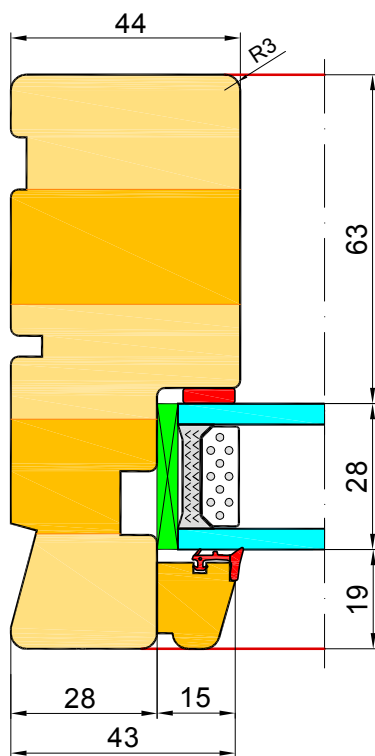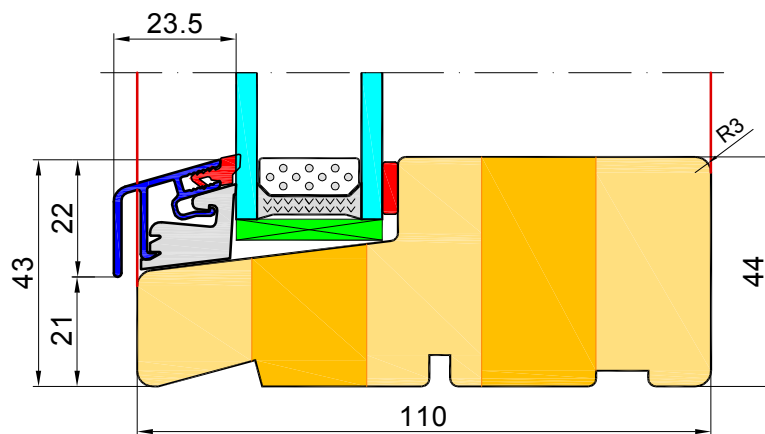
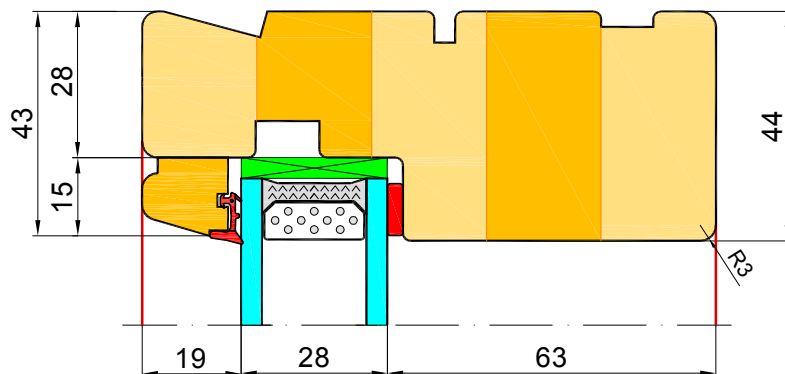



1. Height of the threshold 44mm - Standard.

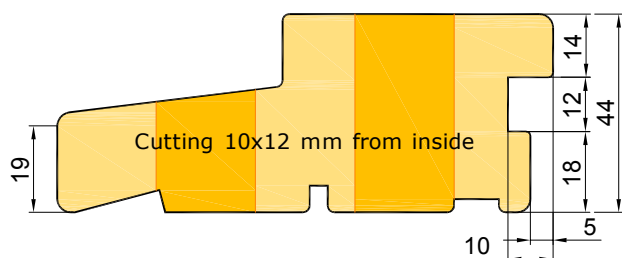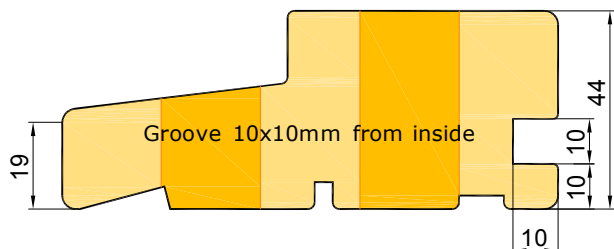

2. Height of the threshold 54mm.

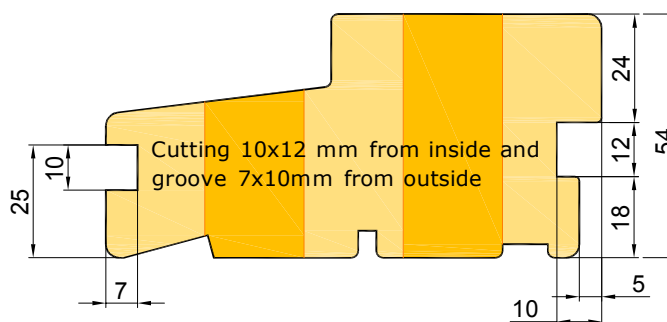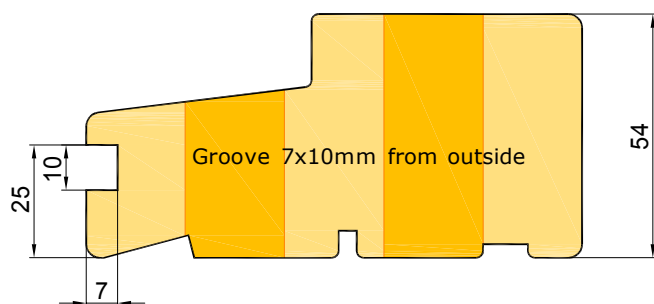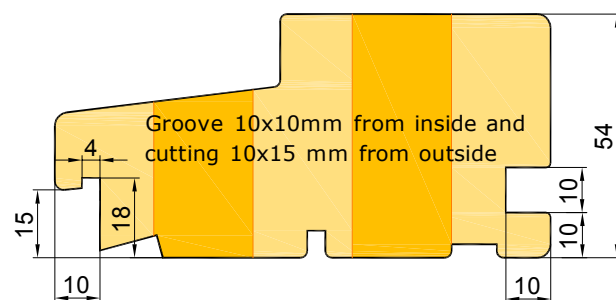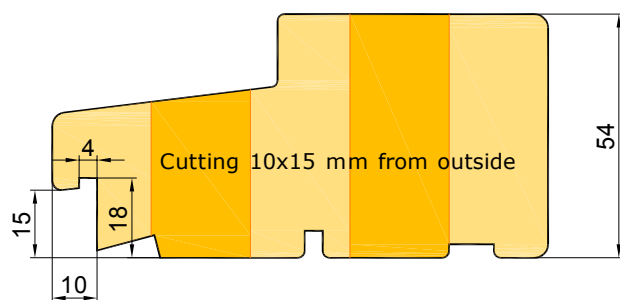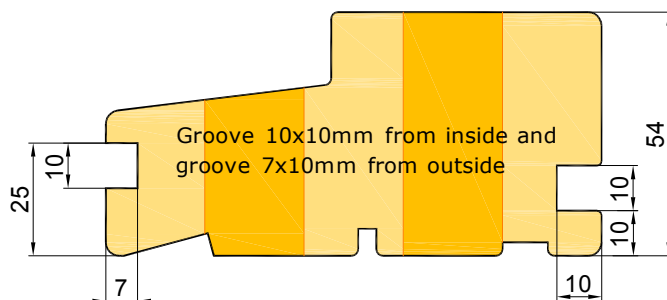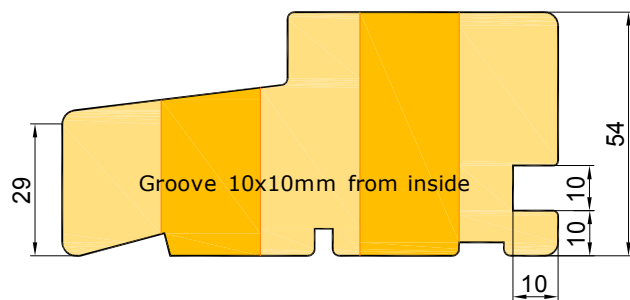

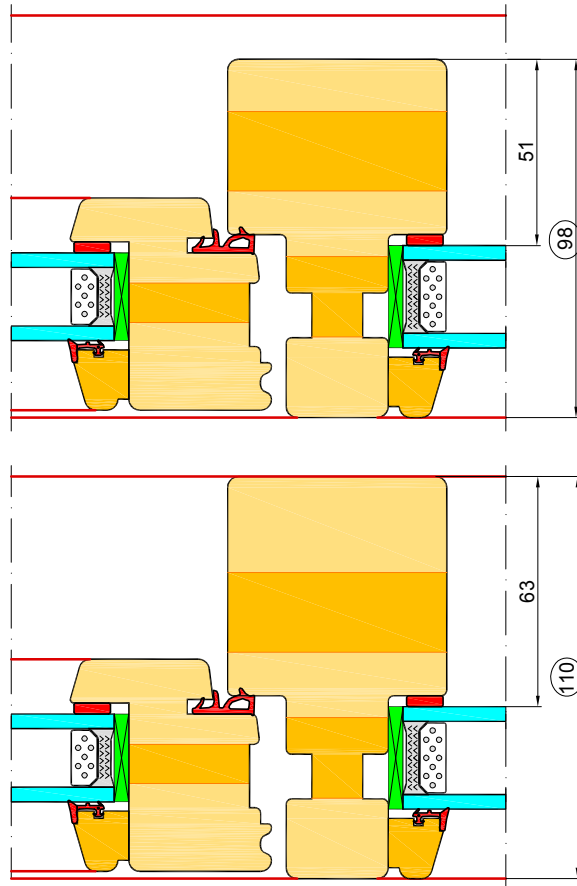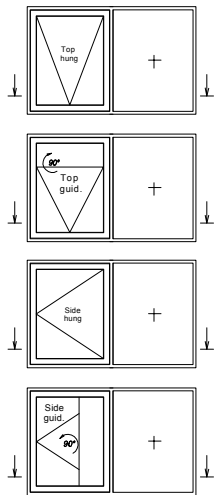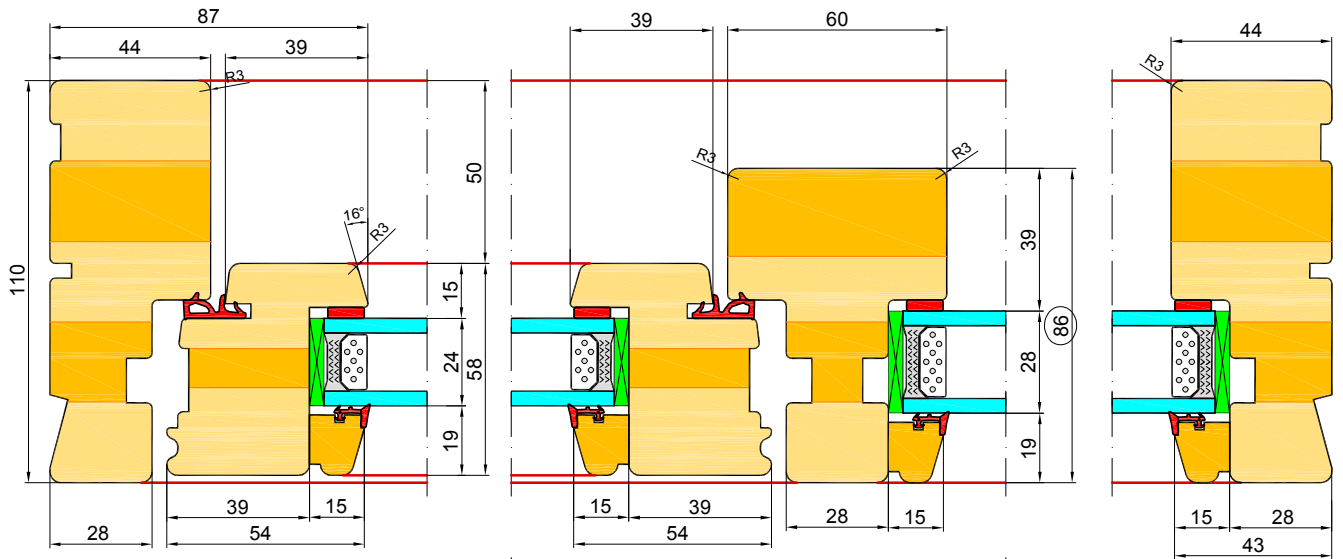

WINPRO

1

Window | Dimensions | **Outer frame** | Sash | Drawing | Informations | Components | Thermic co

Reference line

Trans

Direction  Horizontal  Vertical Quantity 1 transoms

Type EURO\_SLUPEK  Masonry dimensions

Mullion depth 98 mm

86 mm  
98 mm  
110 mm







2




3

Mullion vertical:  
86mm, 98mm, 110mm





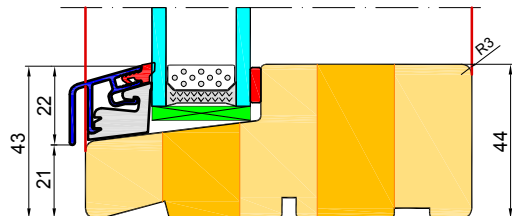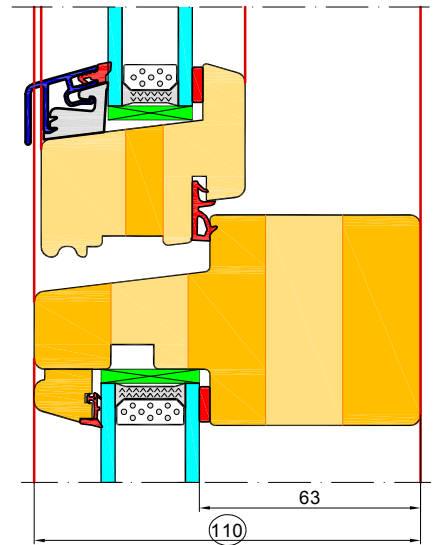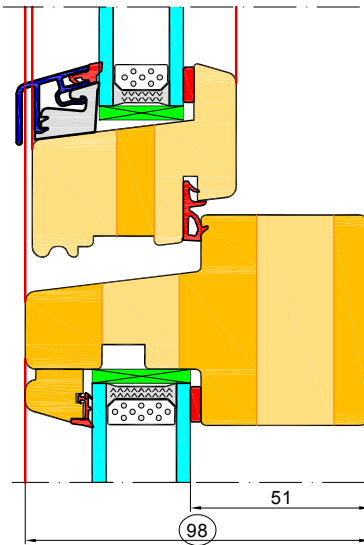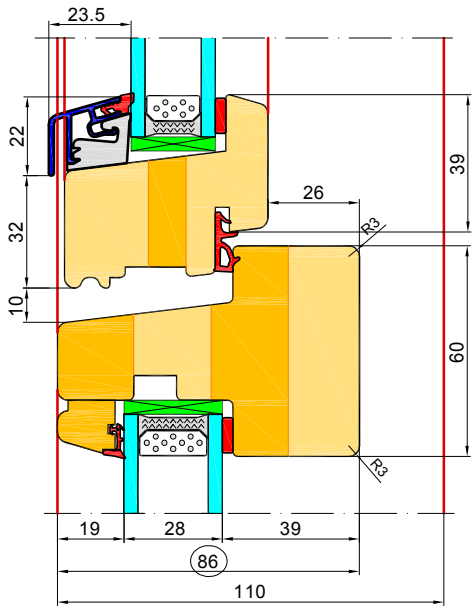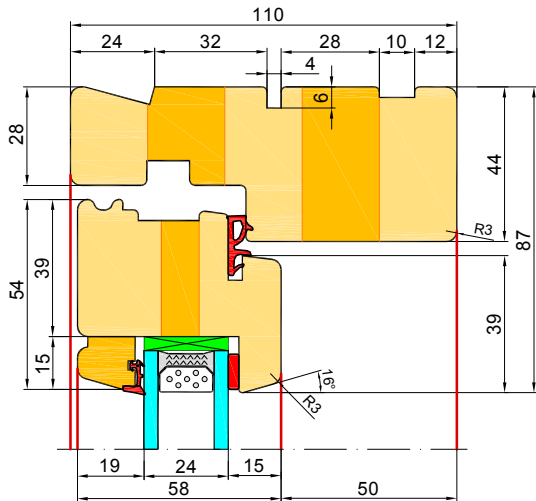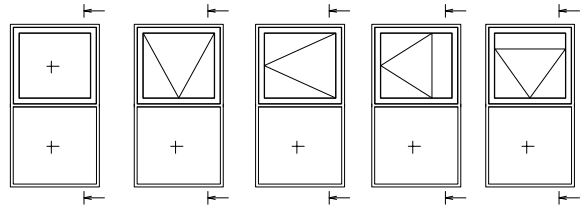




Mullion horizontal:  
86mm, 98mm, 110mm

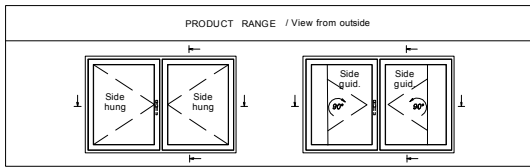

FLYING MOULION

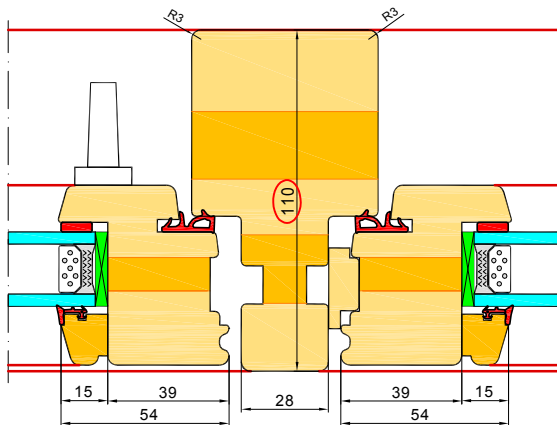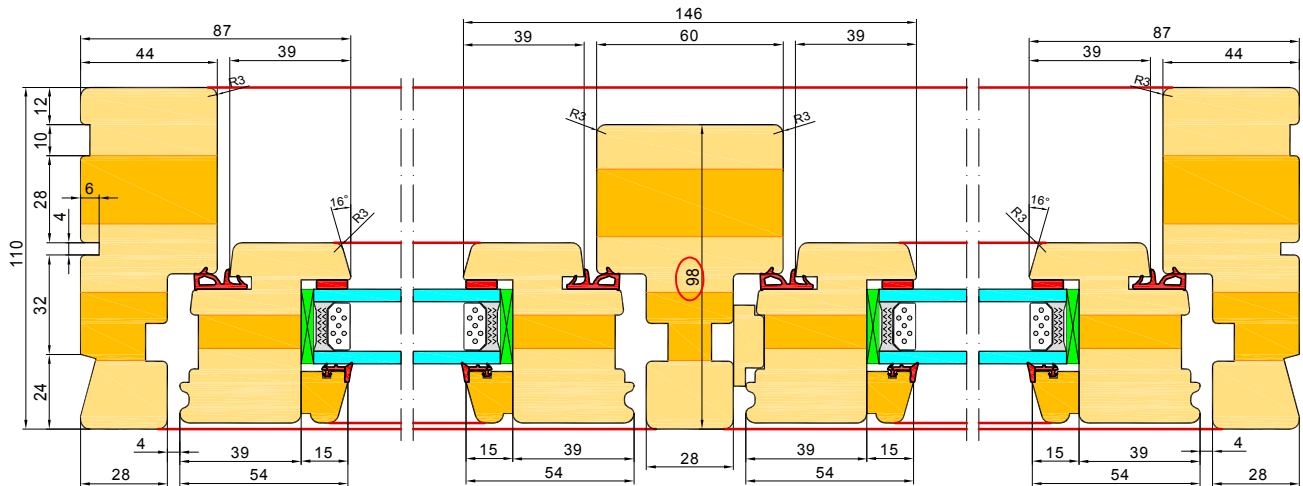


FLYING MOULION:  
98mm, 110mm

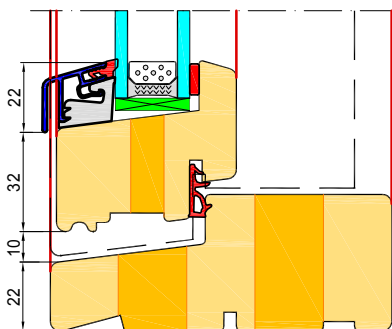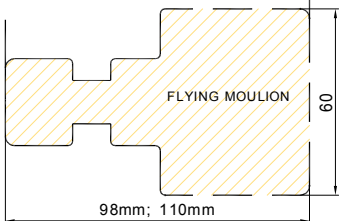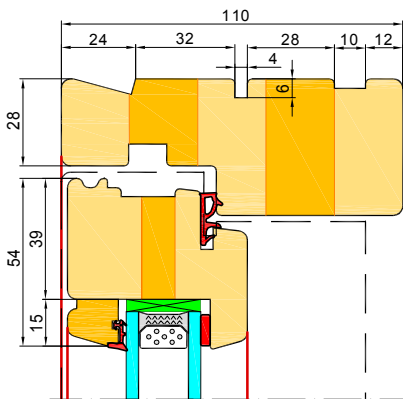





View from inside

EURO-SH	Side Hung with espagnolette
EURO-SH_A	Side hung / Fastenerswind fitting
EURO-TH_A	Top hung / Fasteners and casement stay
EURO-SG_90	Sidestytret (Side Guided 90 degrees) with espagnolette
EURO-SG_90_A	Sidestytret (Side Guided 90 degrees) / Fastenerswind fitting
EURO-SG_180	Side Swing 180 degrees with espagnolette
EURO-SG_180_A	Side Swing 180 degrees / Fastenerswind fitting
EURO-TG_90	Topguided with espagnolette T/G
EURO-TG_90_A	Topguided with fasteners and casement stay T/G
EURO-TG_180	Tophung reversible with espagnolette T/G
EURO-FS	Fixed sash
EURO-SG_90-FE	Passive sash Sidestytret (Side Guided 90 degrees) to flying mullion
EURO-FE	Passive sash Side Hung to flying mullion
EURO-TG_90_OH	Topguided (odchylane na zewn <trz) td="" tylko="" zawiasy<=""> </trz)>

**EURO - Profile SOFT - FIX - sash profile.**



- side 55mm or 104mm,  
- top and bottom 104mm.

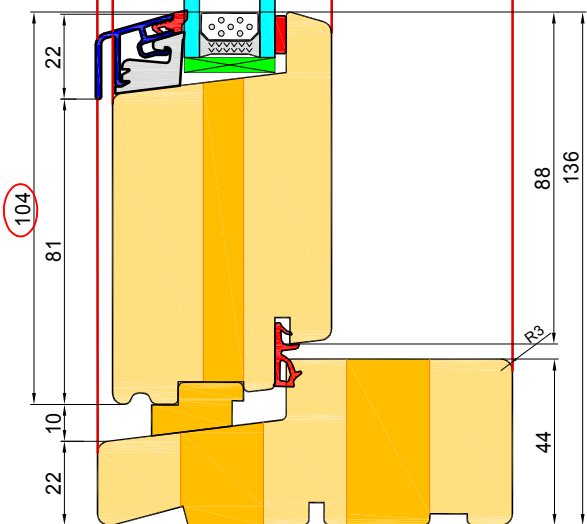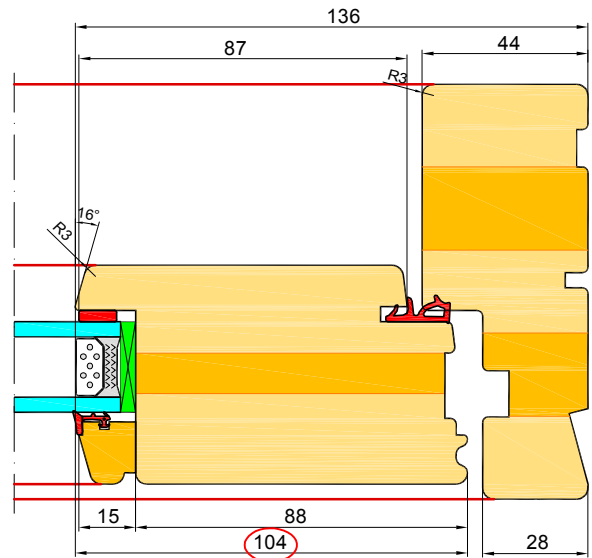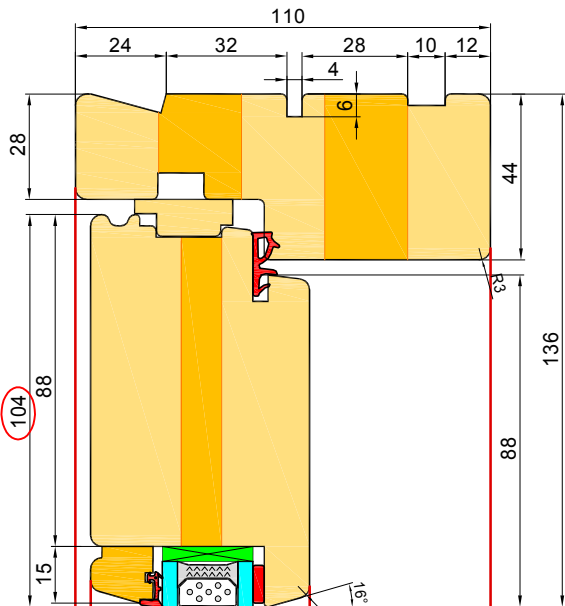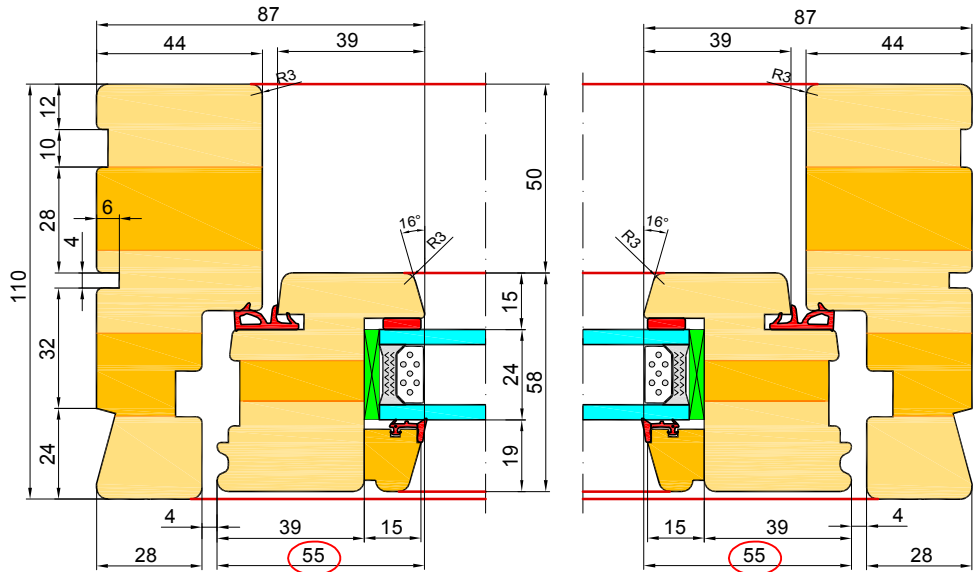





**WINPRO**




Sash	EURO_FIX
Fitting	EURO_FF
Filling type	Glazing
Glazing	
Sash profile top	Yes
Sash profile bottom	Yes
Sash profile side	55 mm
No	
55 mm	
104 mm	
Przedstawienie zestawu szybowego	
	Drzwi

Threshold: wood


fiberglass




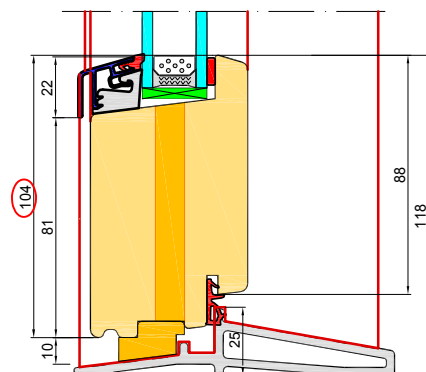


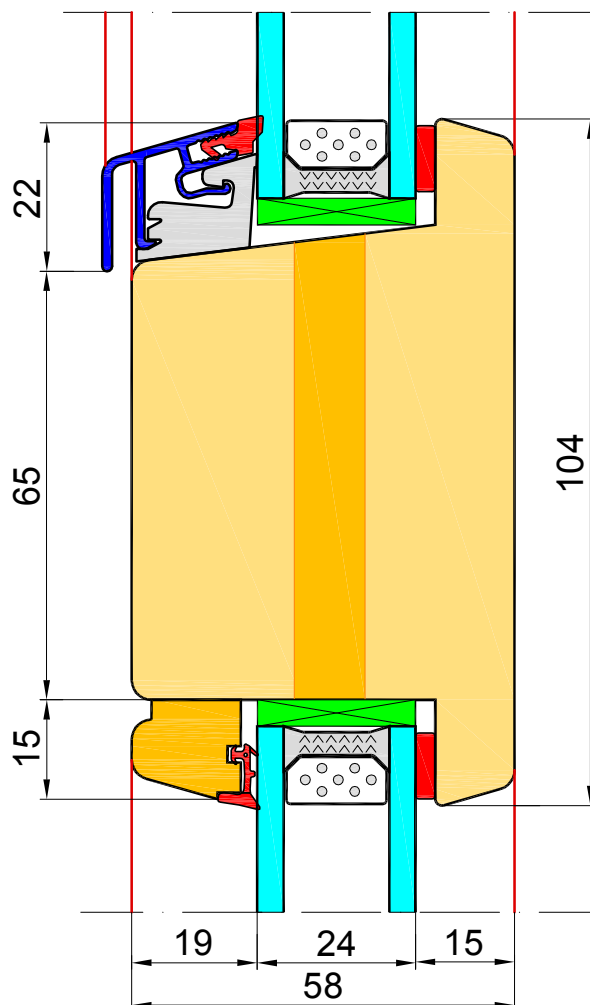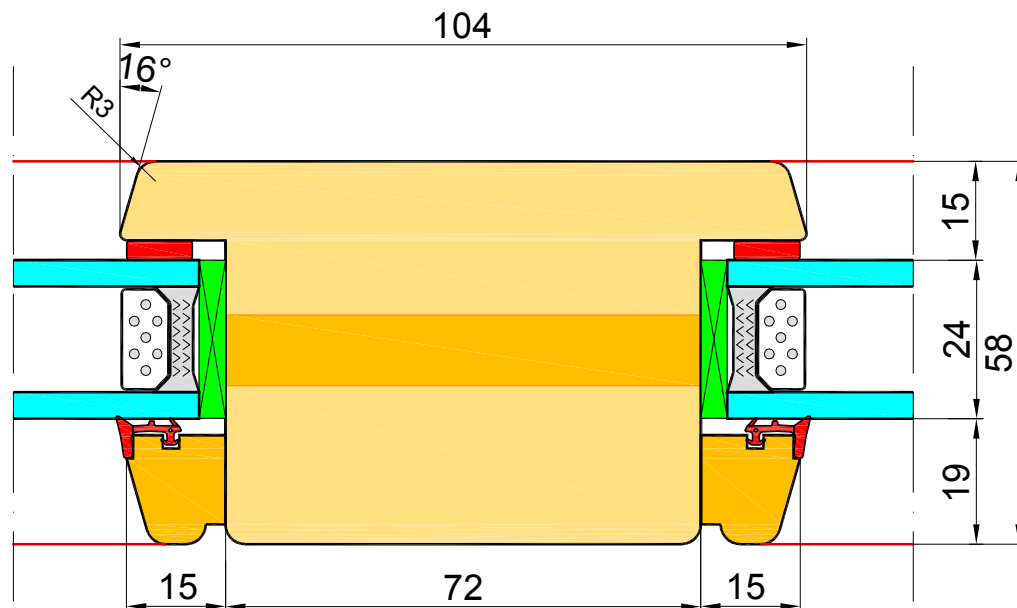


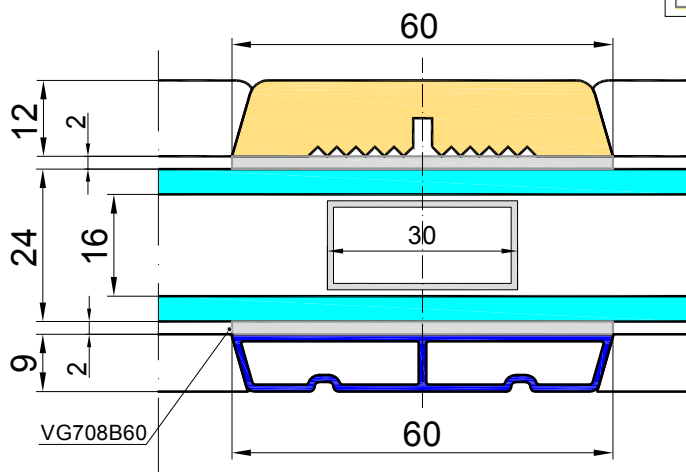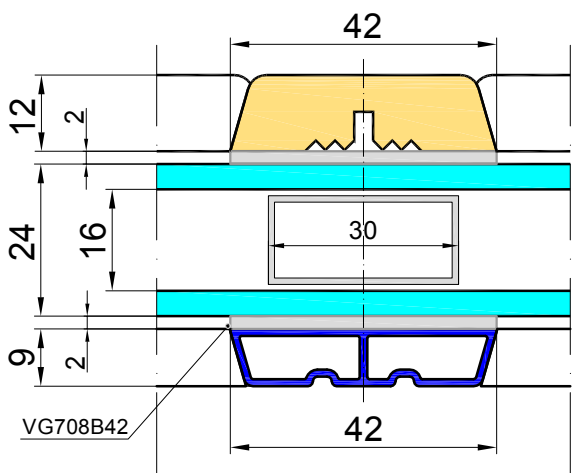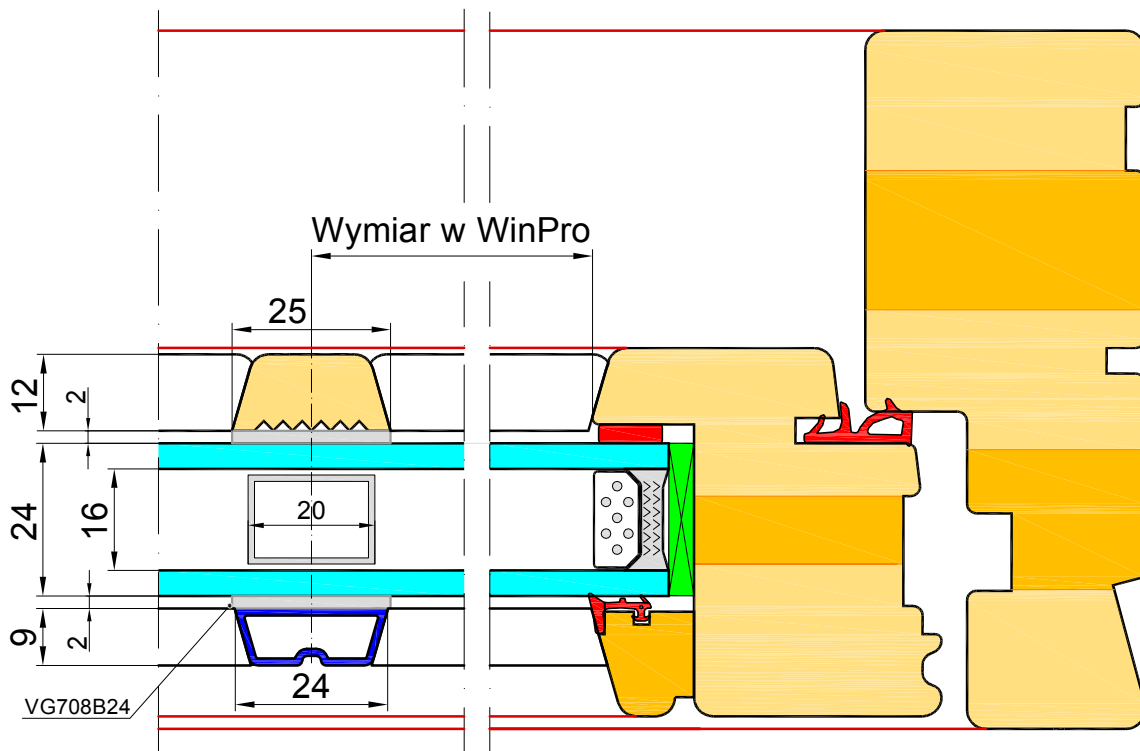


WINPRO	
T_G_D_WZ	Stick on glue bars - special design
WIZ_EURO_25	25mm Energy Bar
WIZ_EURO_42	42mm Energy Bar
WIZ_EURO_60	60mm Energy Bar
ZEW_EURO_25	25mm Energy Bar (without spacer between glass)
ZEW_EURO_42	42mm Energy Bar (without spacer between glass)
ZEW_EURO_60	60mm Energy Bar (without spacer between glass)
ZE 18	Inside glass bar 18mm matt gold
ZE 18N	Inside glass bar 18mm shined gold
ZE 26	Inside glass bar 26mm matt gold
ZE 8	Inside glass bar 8mm gold



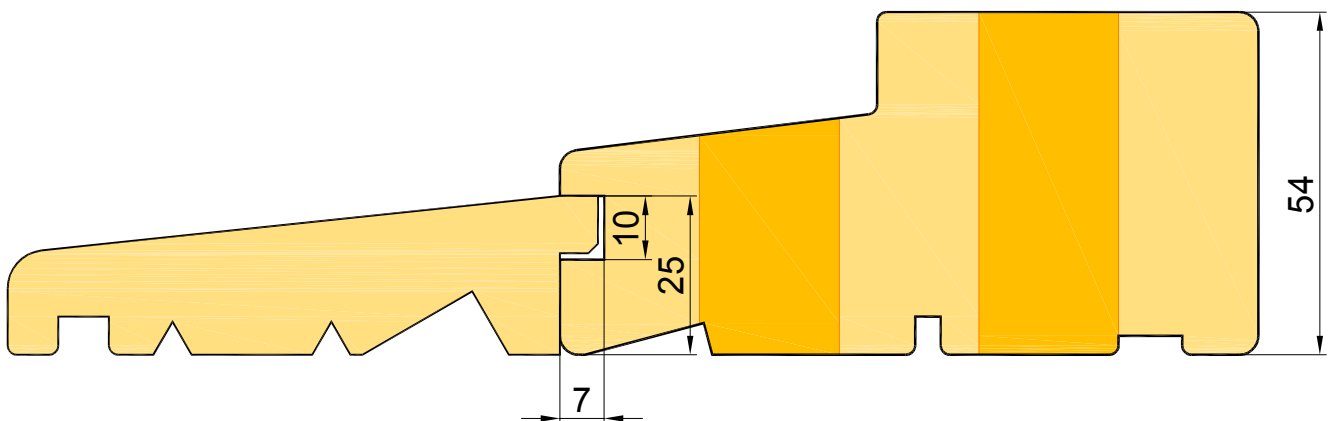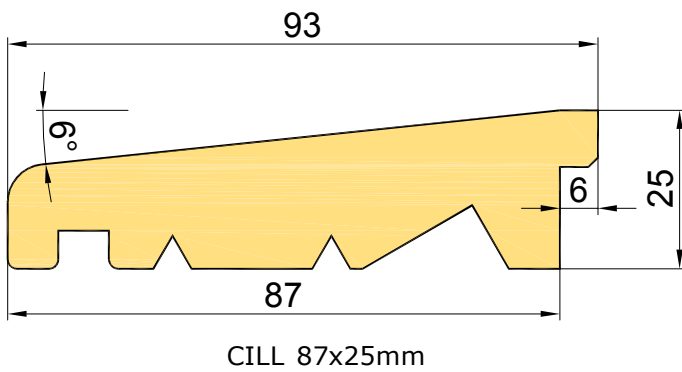
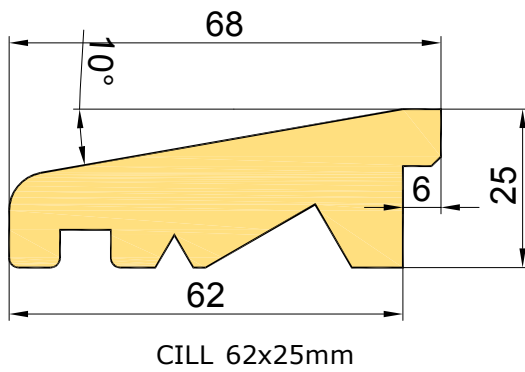
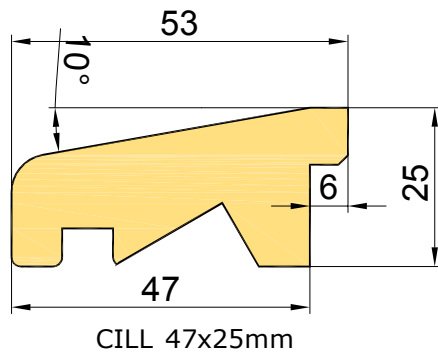


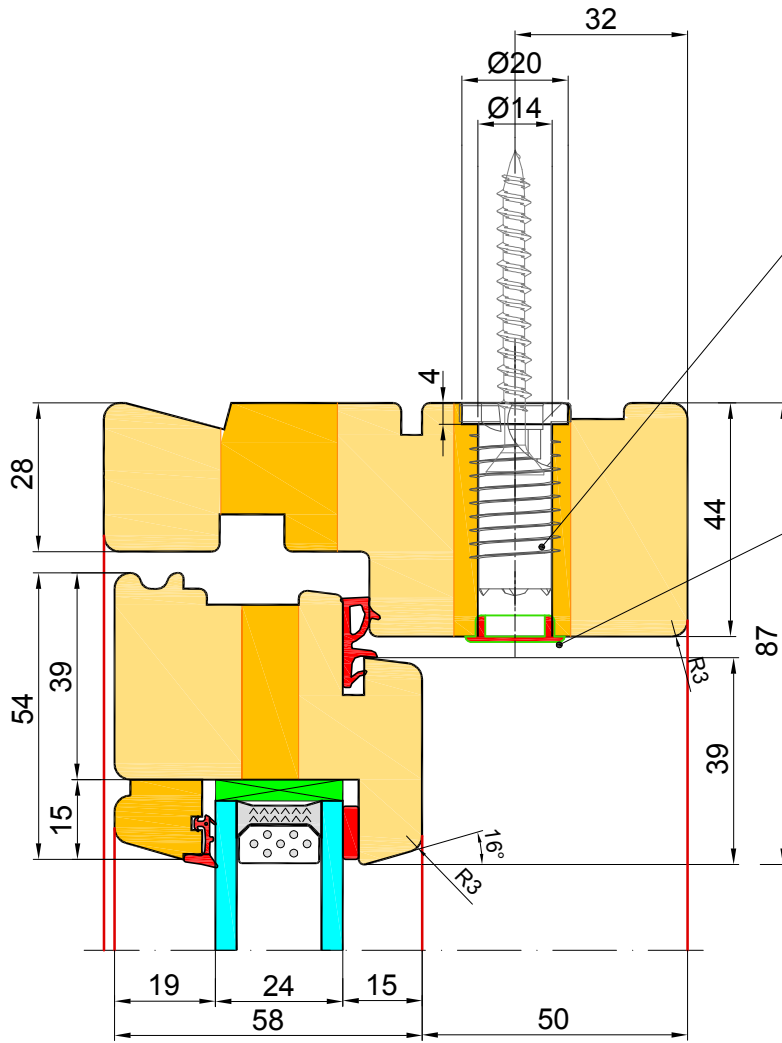

Adjufix






PVC plug  
white, brown, gray

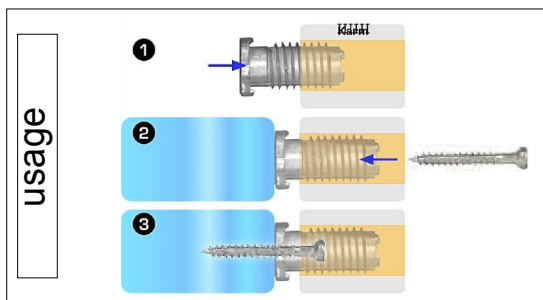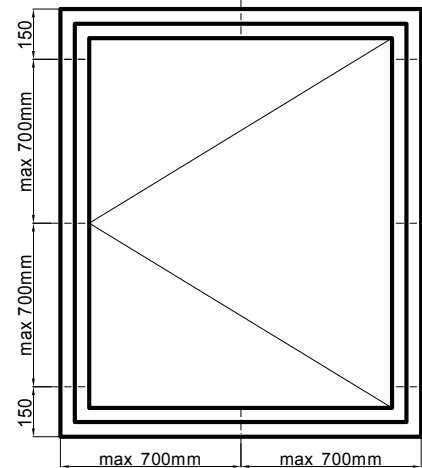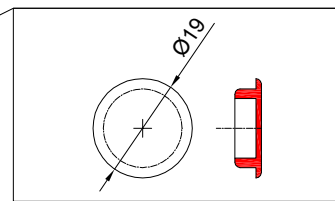


**Outer frame**





**WINPRO**

Profile	Softline
2-colour	No
Product finish both sides	RAL9010
Bottom bead color	RAL9010
Vienna bar colour (if exists)	select
Threshold type	Window timber threshold 44mm
Threshold undercutting	No cutting in threshold
Groove to the right frame jamb	No groove
Groove to the left frame jamb	No groove
Groove to the frame head	No groove
Frame widener to thickness 120 mm.	No
With adjufix installation system?	With adjufix and timber PINE, unpainted
Without adjufix	
With adjufix and white plugs covers + adjufix screws	
With adjufix and brown plugs covers + adjufix screws	
With adjufix and grey plugs covers + adjufix screws	
With adjufix and timber PINE unpainted covers + adjufix screws	

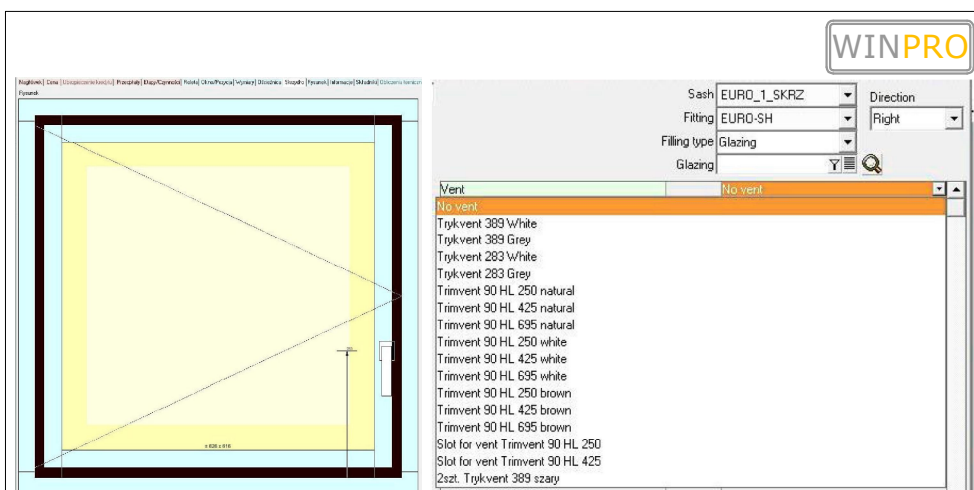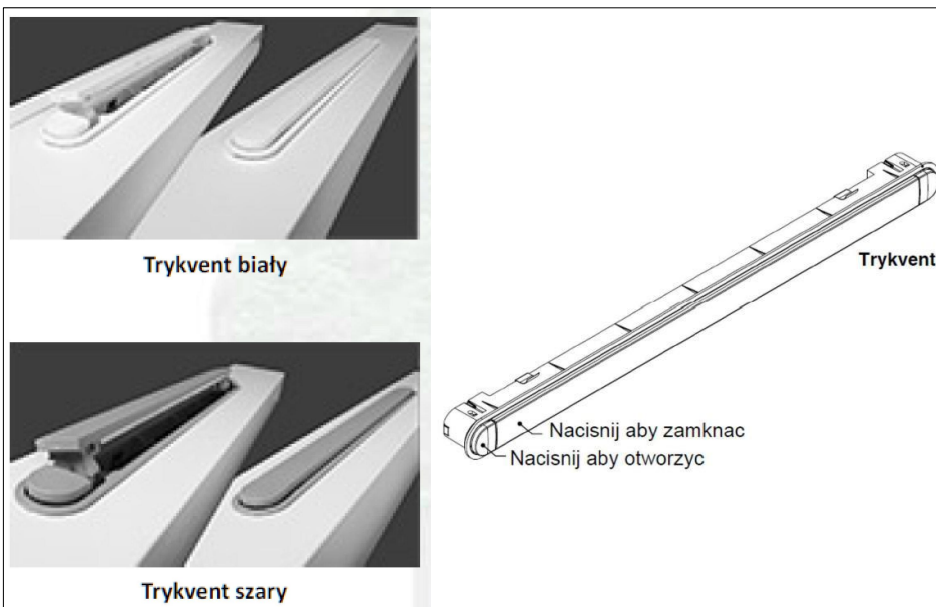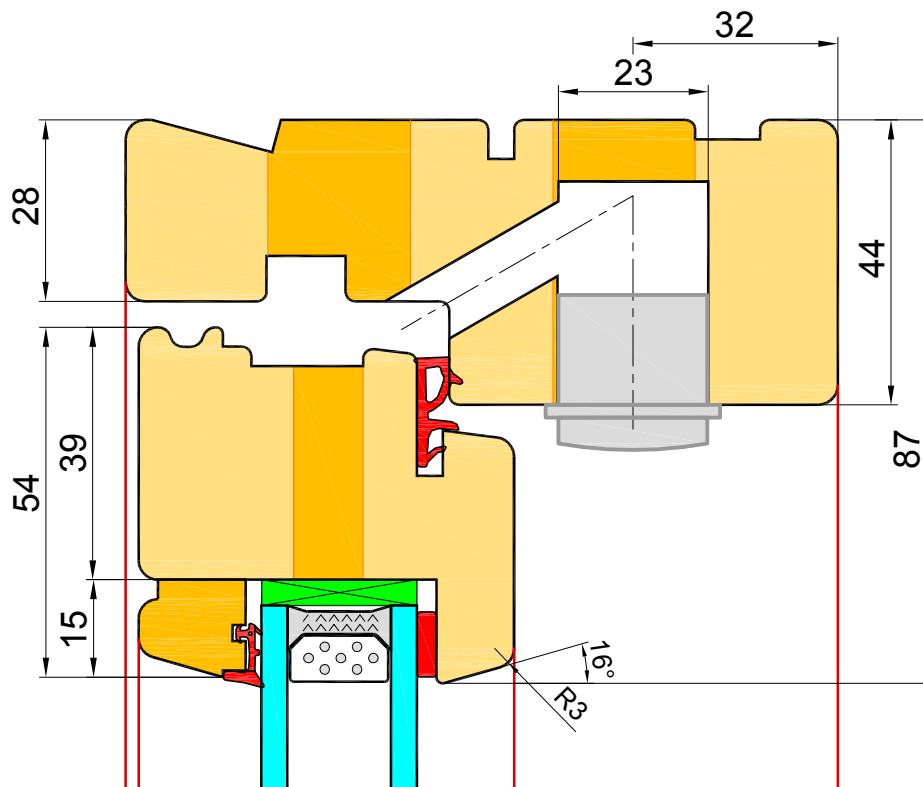



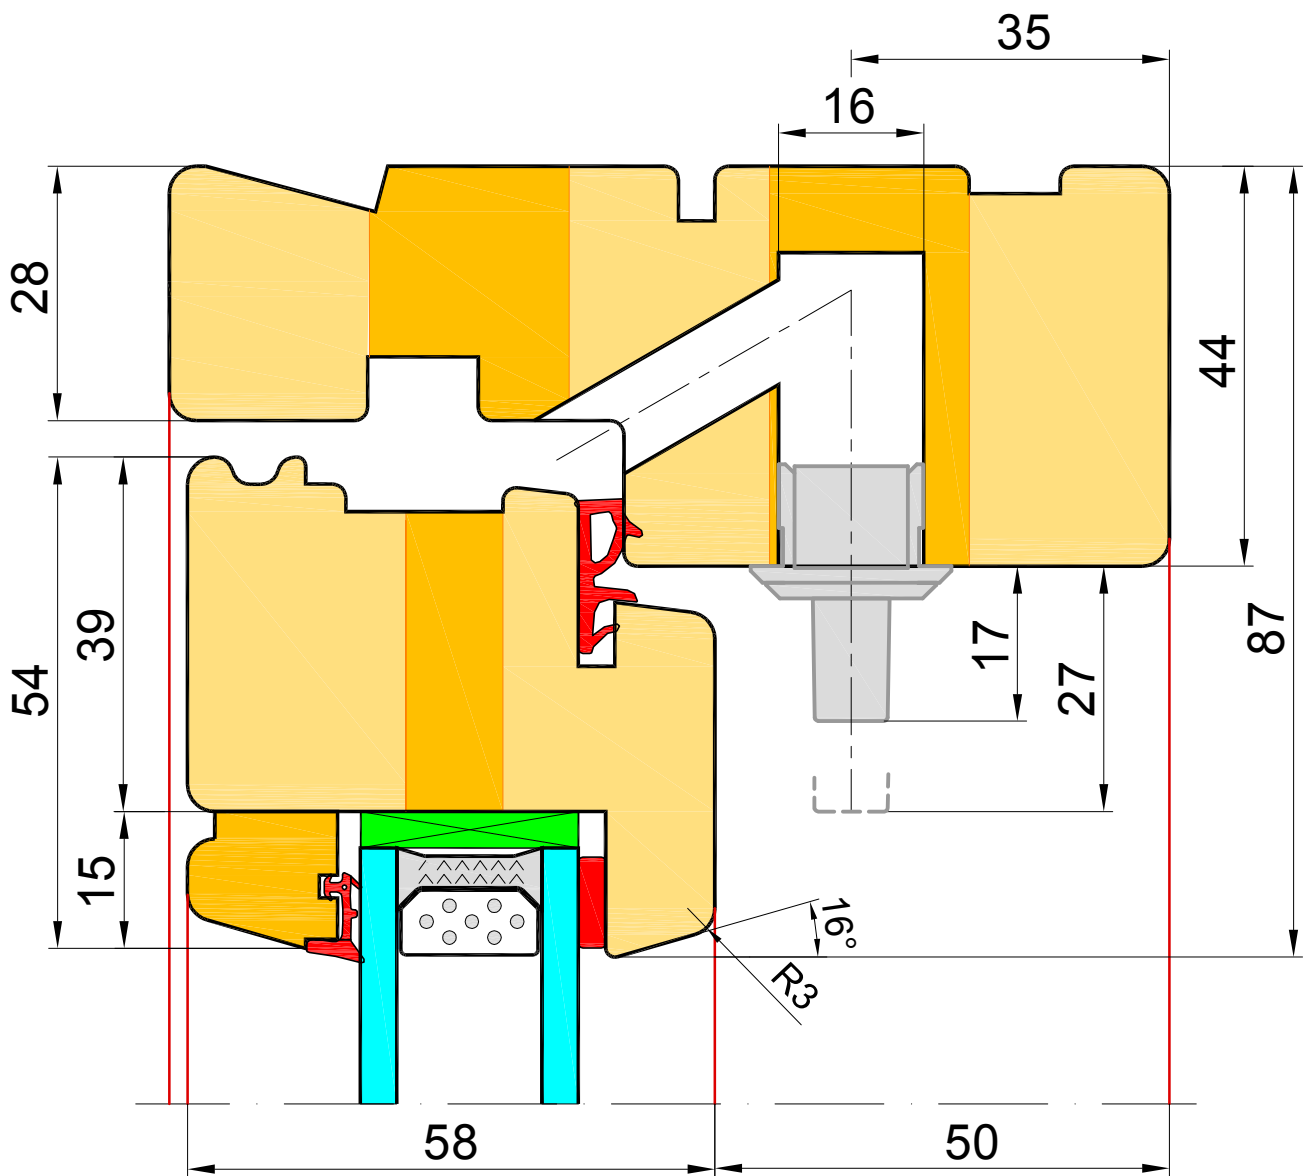

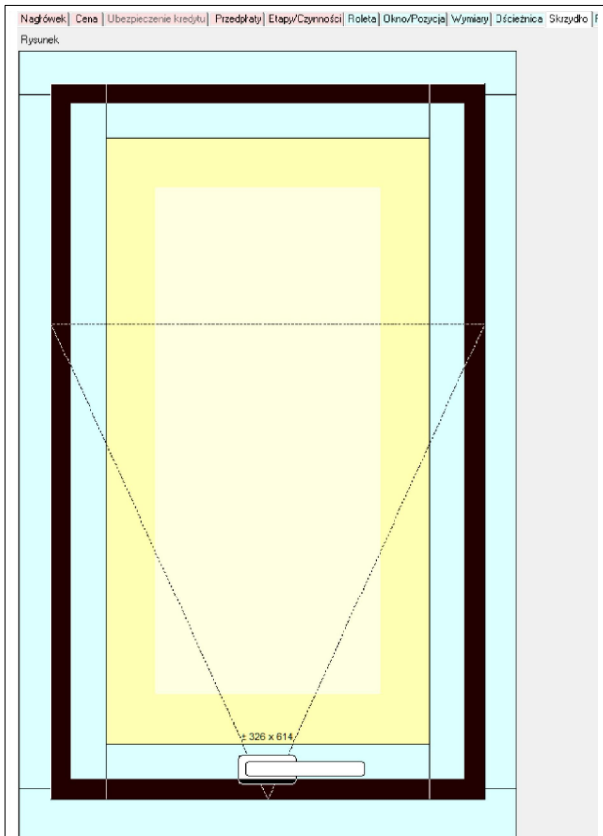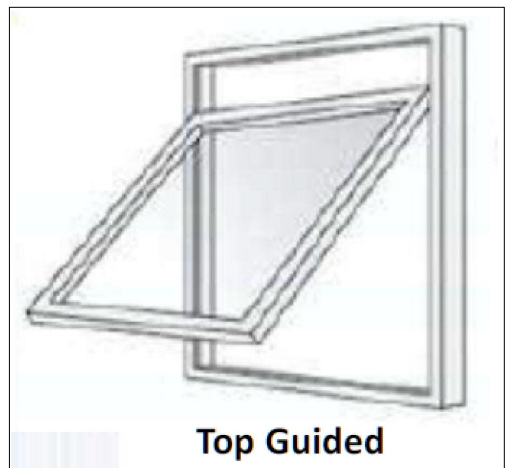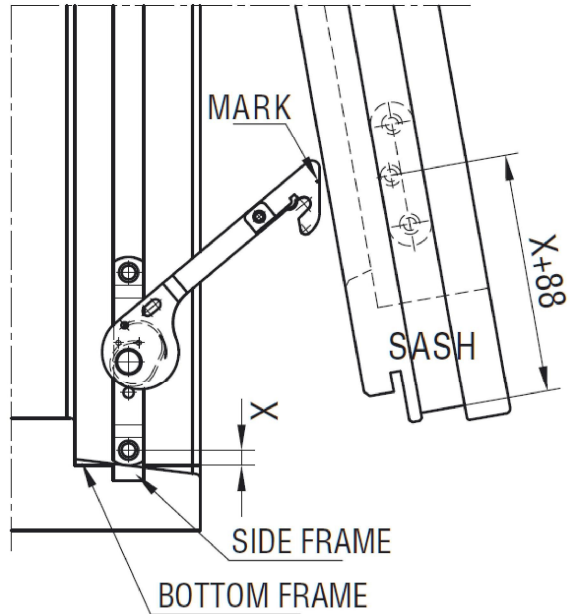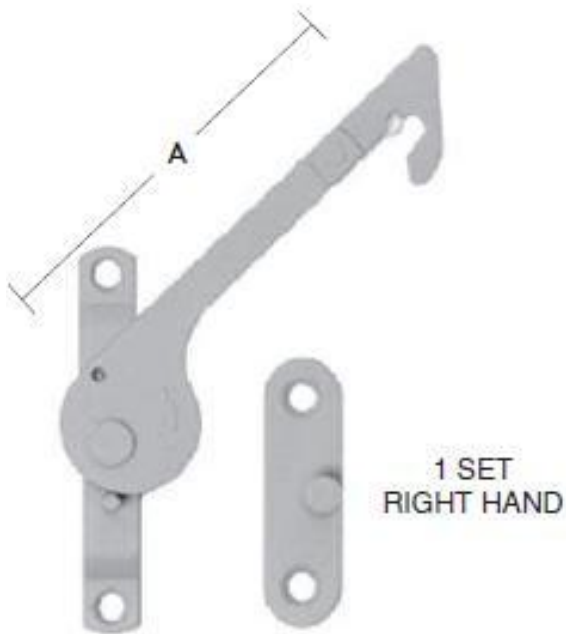

WINPRO	
Sash	EURO_1_SKRZ
Fitting	EURO-TG_90
Filling type	Glazing
Glazing	
Vent	No vent
Folia ochronna zestawu szybowego	Bez folii
Handle	F9 Titanium nonlocking handle
Child safety handle blockade	No blockade
Safety restrictor IPA21236	Without restrictor
Without restrictor	
With restrictor	

EURO - Profile SOFT - handle





Window /terrace(balcony)  
door non-lockable handle  
Hoppe Mini Tokyo





Child safety device  
mounted under the non-  
lockable handle(optional)



Window /terrace(balcony)  
door lockable handle Hoppe  
Tokyo

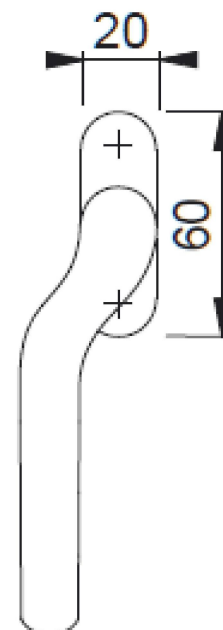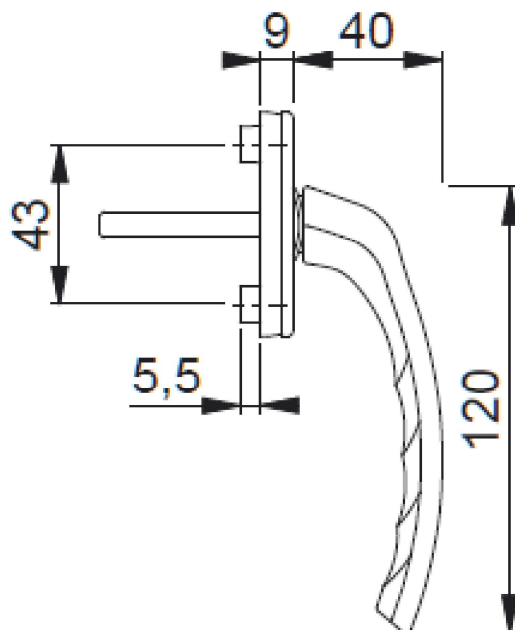

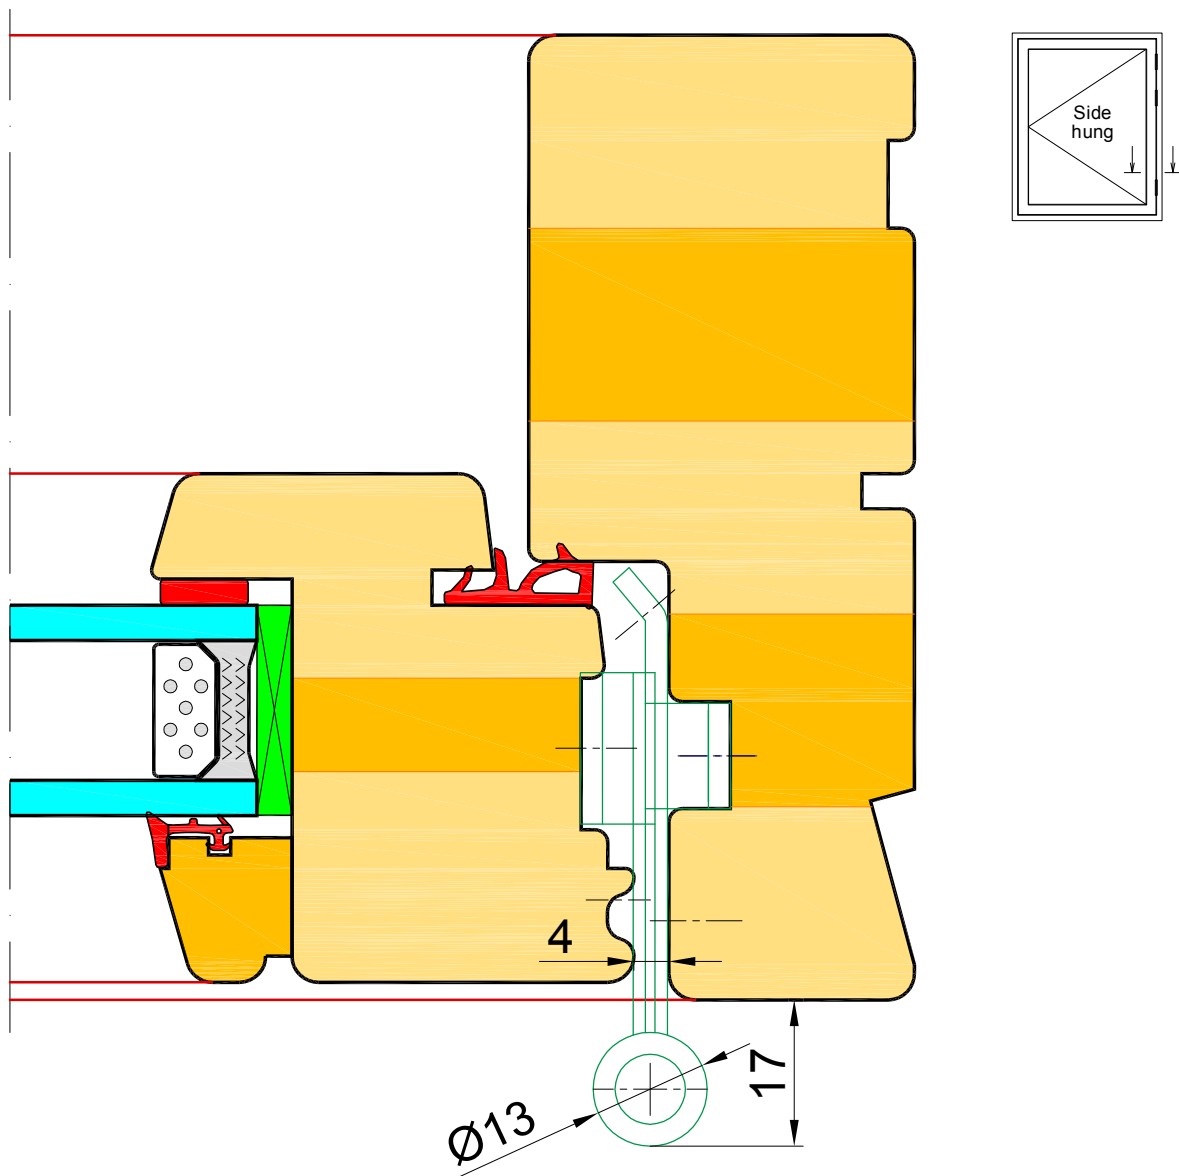

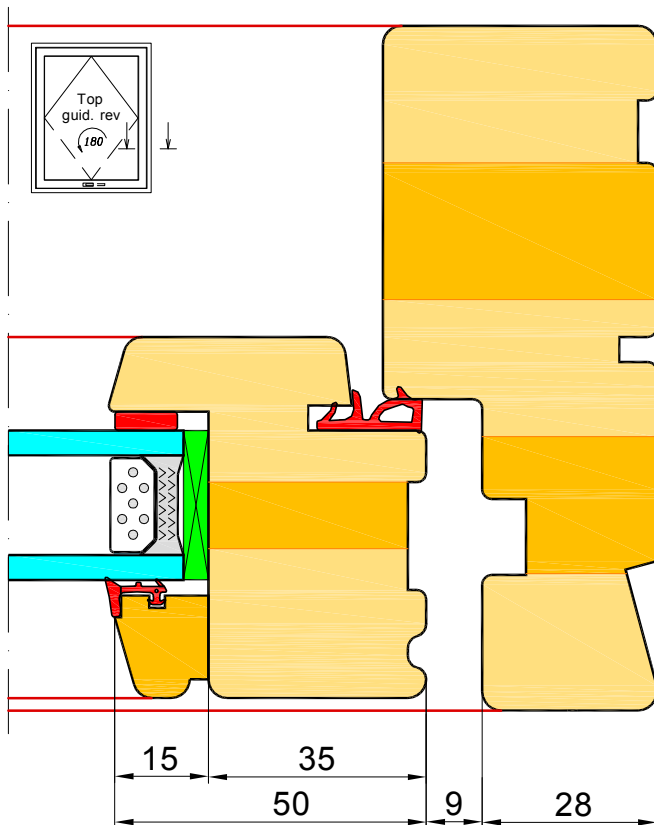

I

II




III

IV



V



**EURO - Profile SOFT - connection of windows.**

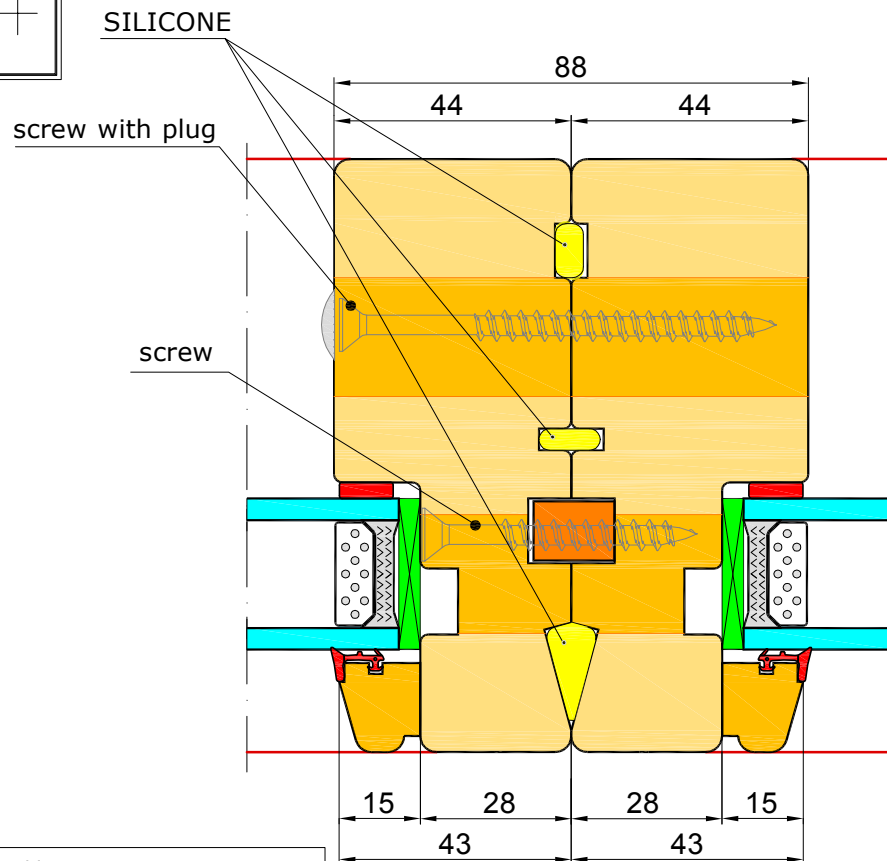

NOTE: Drill holes for assembly screws  
The diameter of the hole is equal to the core of the screw.

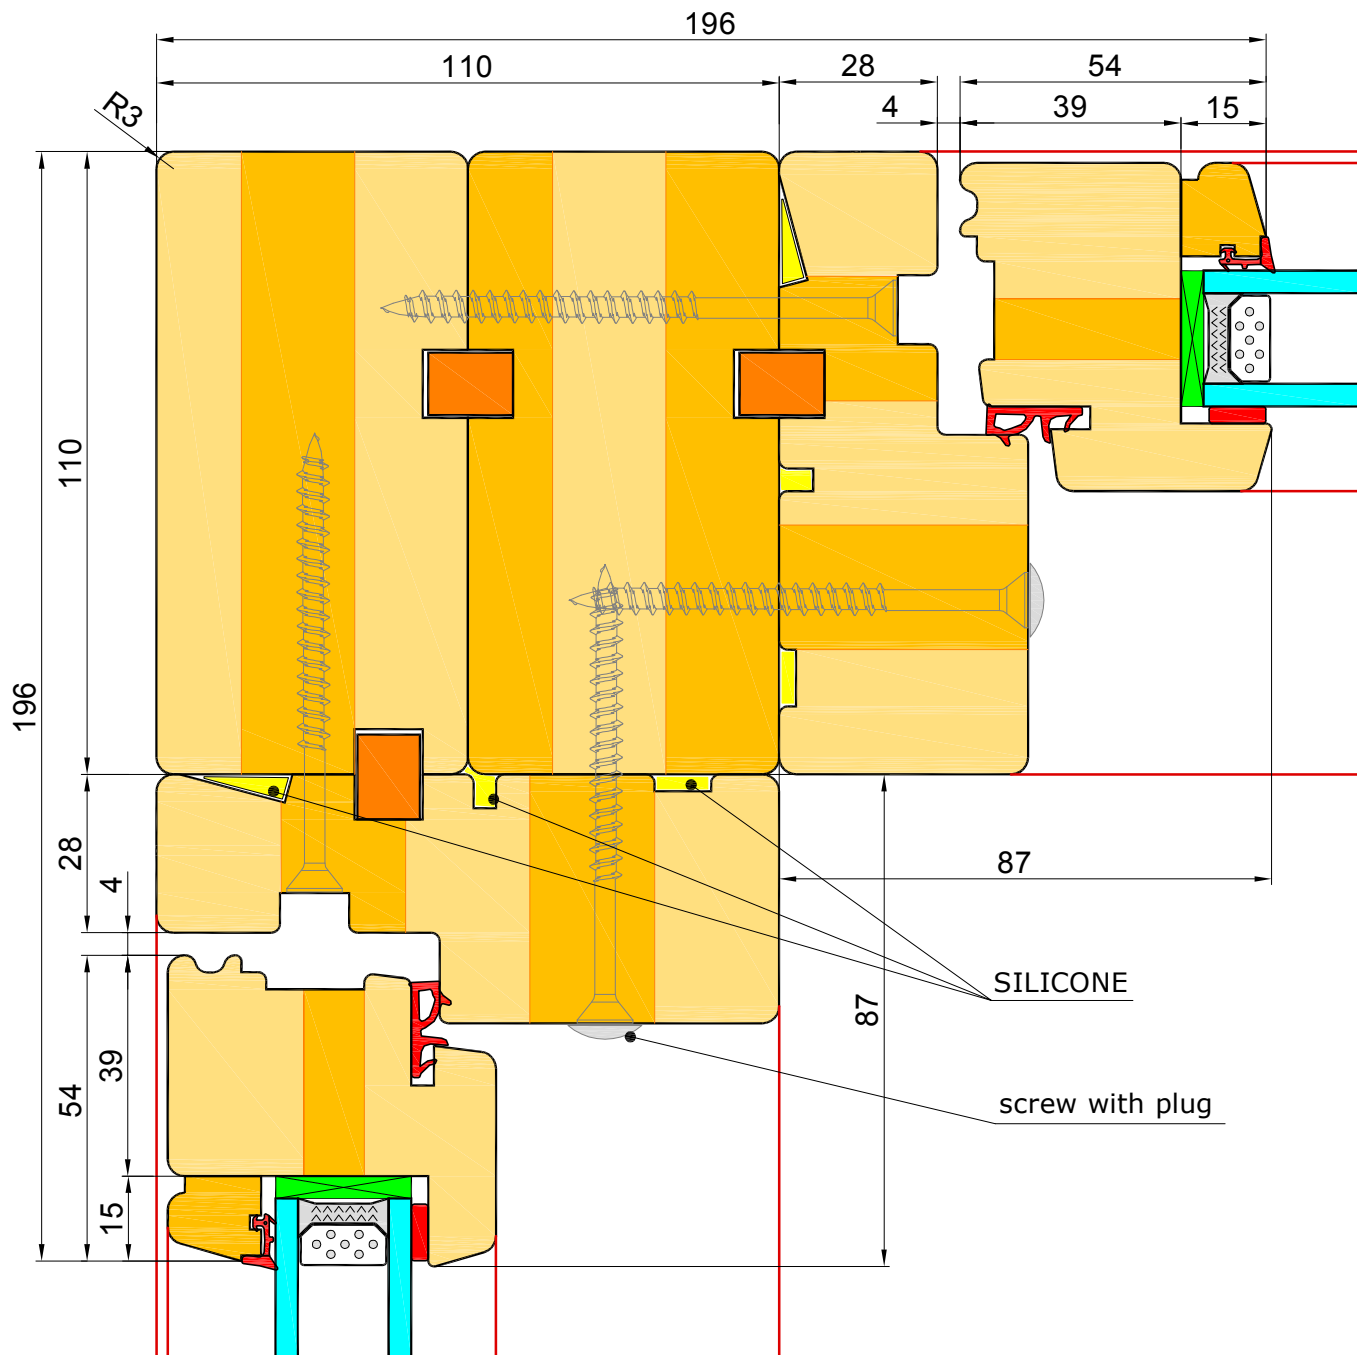


NOTE: Drill holes for assembly screws  
The diameter of the hole is equal to the core of the screw.





**Frame widener:**







**20mm; 30mm; 40mm; 50mm; 60mm; 70mm; 80mm; 100mm.**

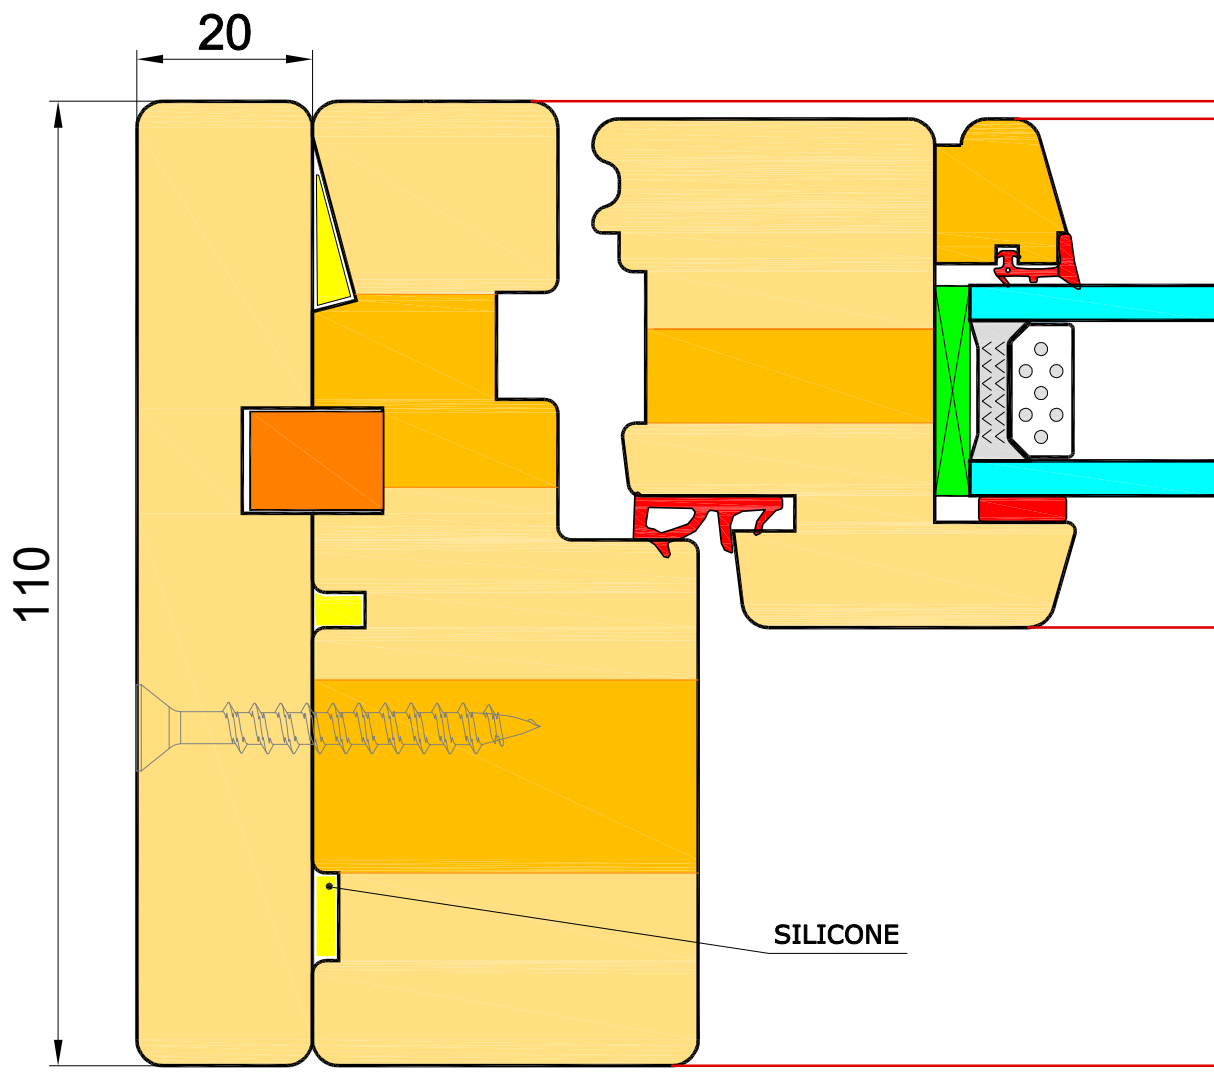






**NOTE: Drill holes for assembly screws  
The diameter of the hole is equal to the core of the screw.**





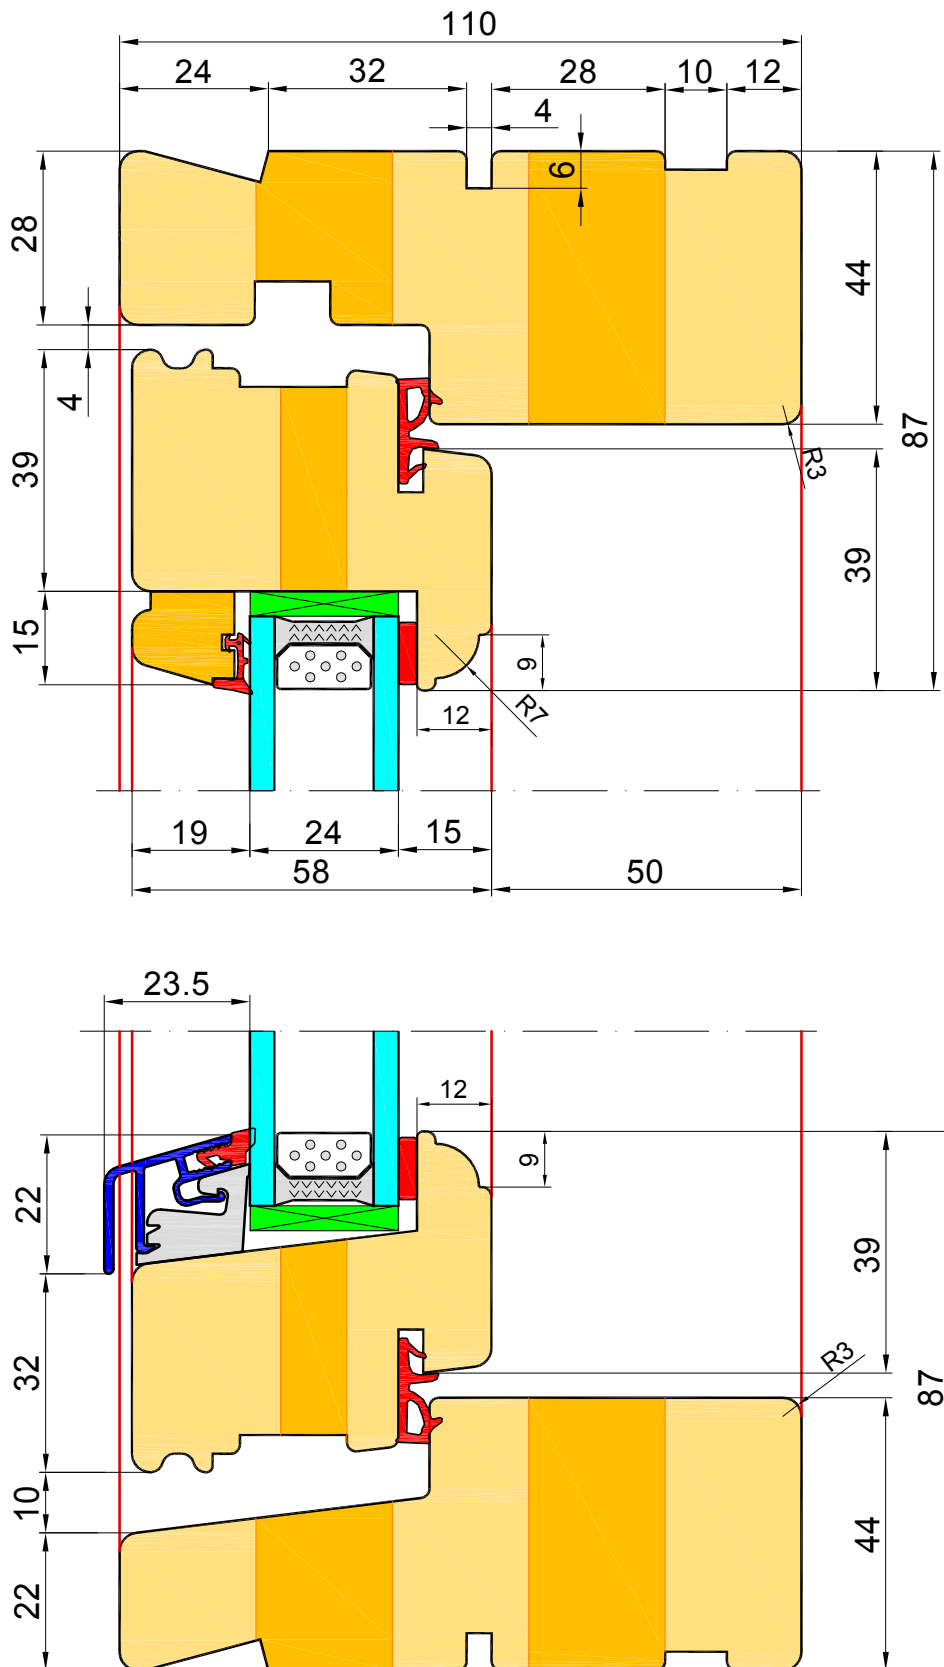
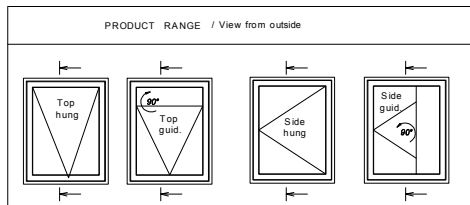


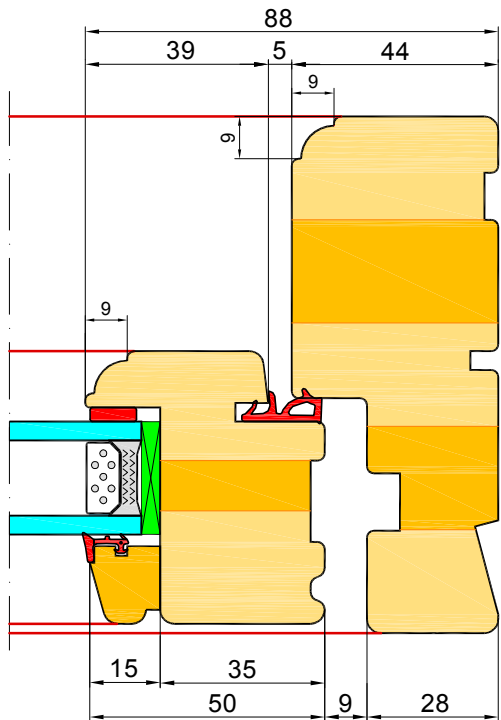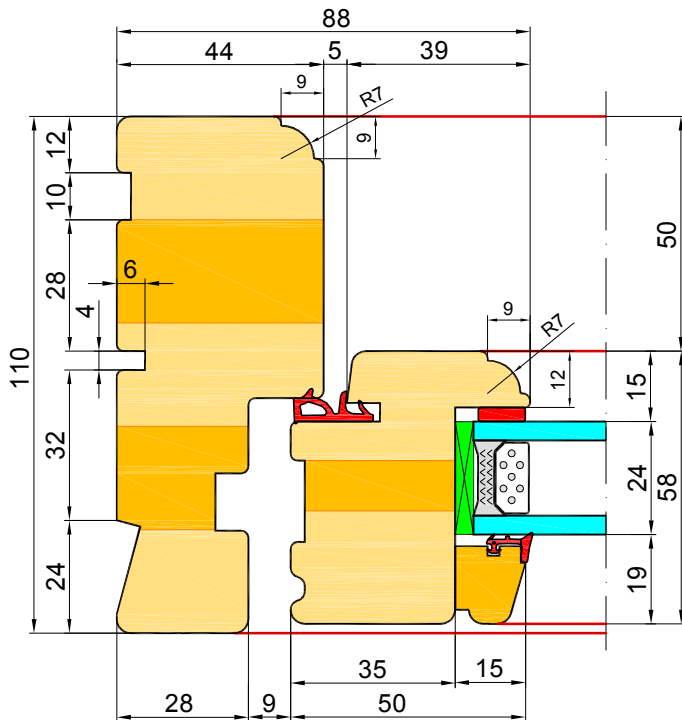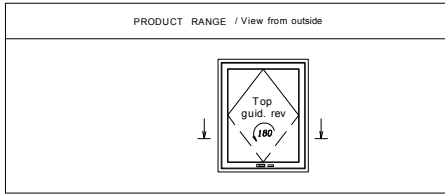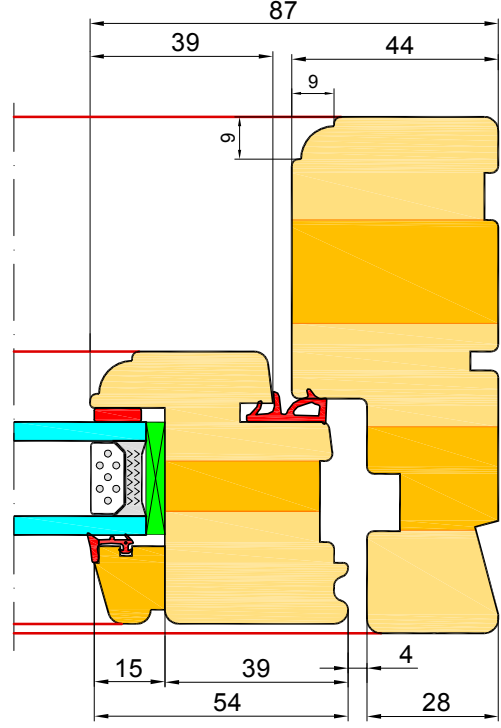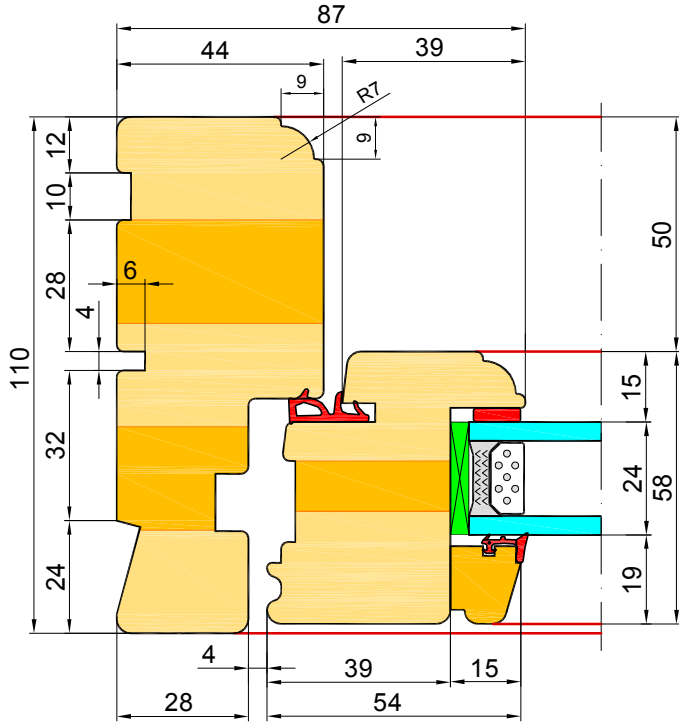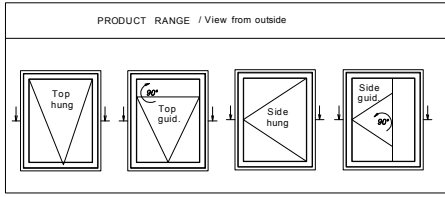

EURO - Profile CLASSIC - FIX.

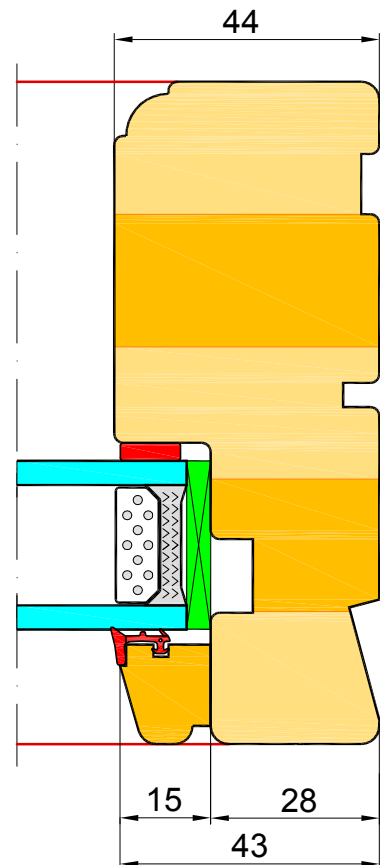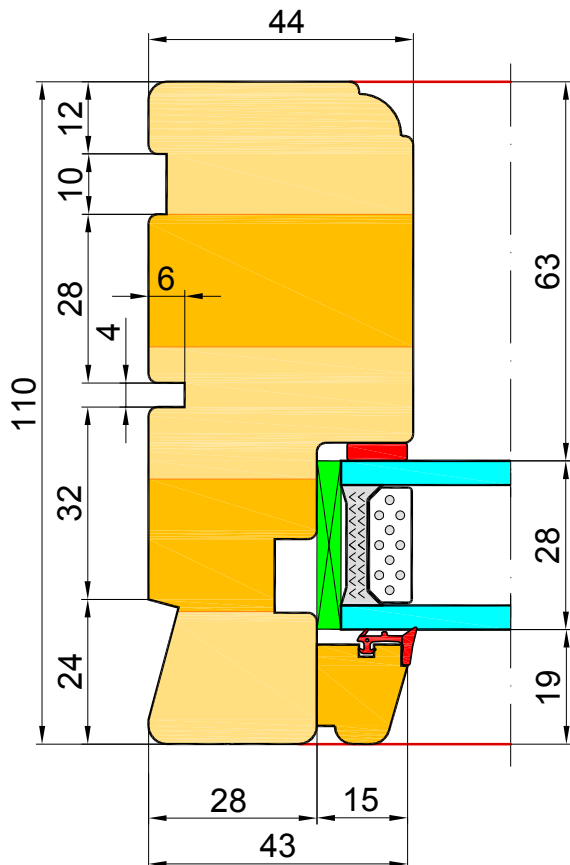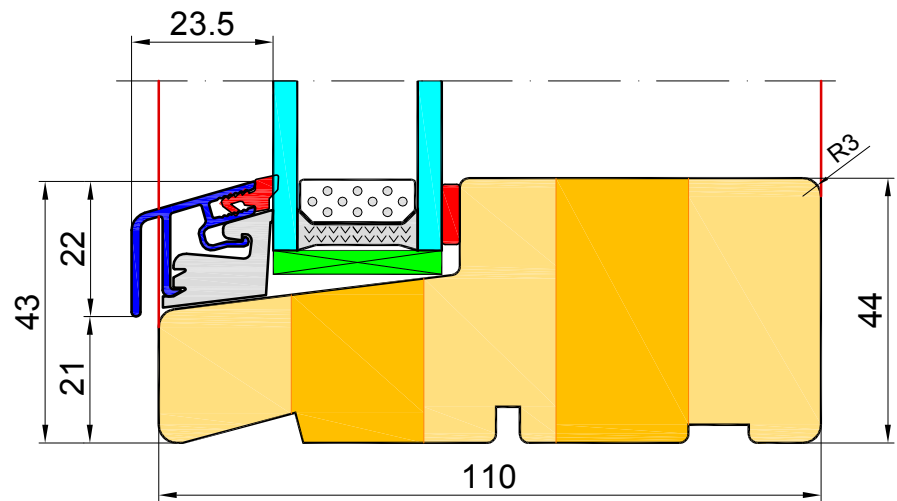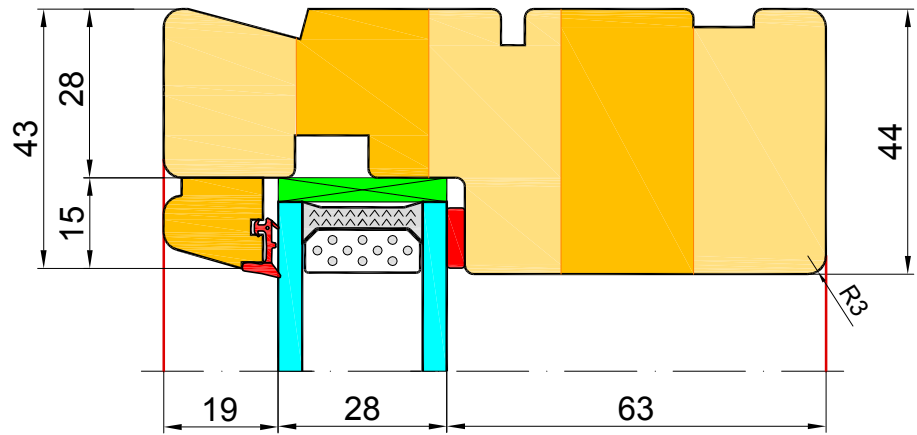

Mullion vertical:  
86mm, 98mm, 110mm

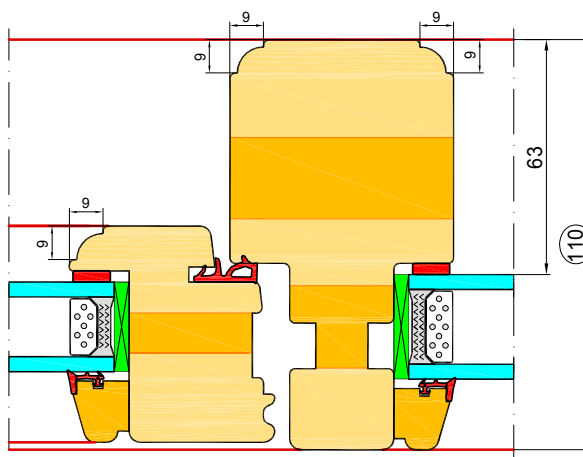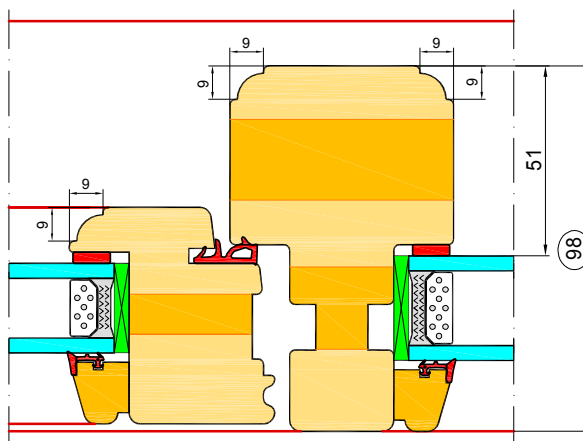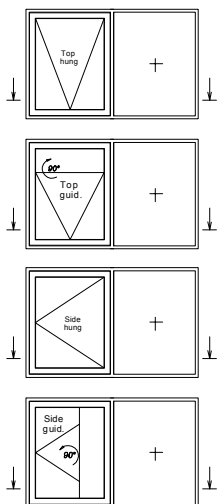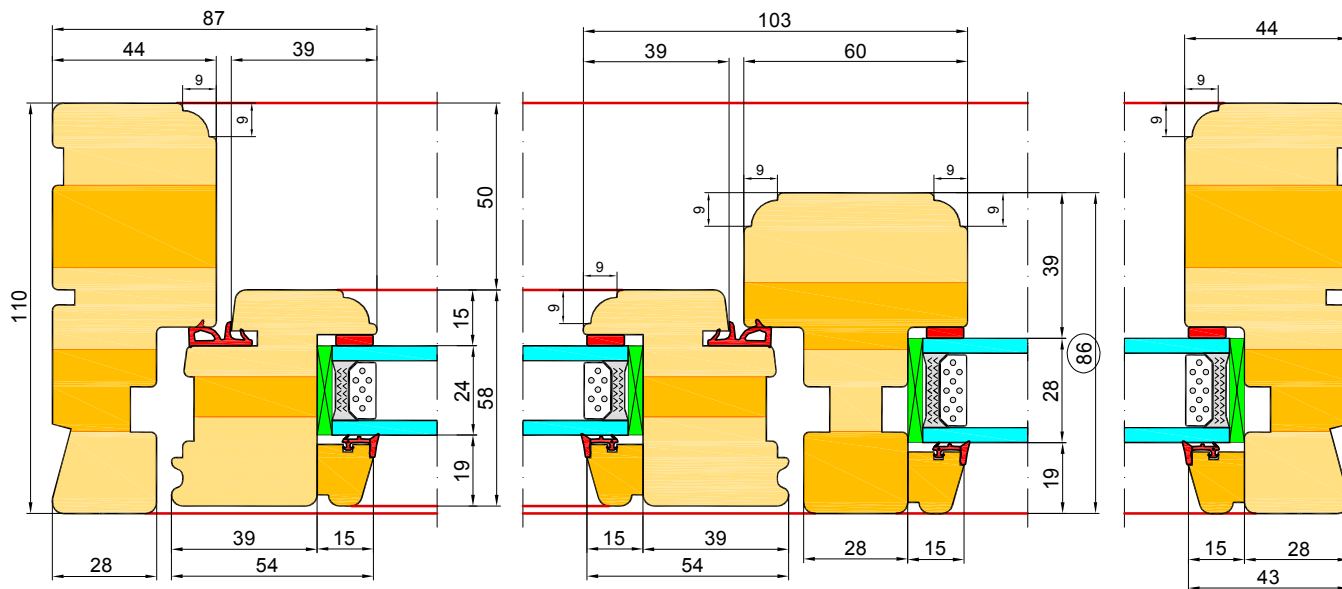

Mullion horizontal:  
86mm, 98mm, 110mm

